



FORM B

FORM B

Applications for a license= in terms of the Petroleum Pipelines Act, 2003 (Act No. 60 of 2003)

INSTRUCTIONS

1. Prior to completing this form, you are advised to read the following documents:
 - (a) the Petroleum Pipelines Act, 2003 (Act No. 60 of 2003) and its Regulations; and
 - (b) the Rules made in terms of the Petroleum Pipelines Act specifically Rules 1 to 11.
2. Please note that this form has three chapters and that applicants must provide all information and supporting documentation required. Incomplete applications will not be accepted.
3. The completed form with supporting documentation must be delivered to the Energy Regulator:
 - (a) by registered mail to: P O Box 40343, Arcadia 0007; or
 - (b) by hand at: Kulawula House, 526 Madiba Street, Arcadia, Pretoria; or
 - (c) electronically to pipelines@nersa.org.za; or
 - (d) by fax to 012 401 4700
4. If you want to request the confidential treatment of certain information in your application, you must make the request in accordance with Rule 4 of the Rules made in terms of the Petroleum Pipelines Act.

Enquiries:

Contact:	Executive Manager: Petroleum Pipelines Regulation
Contact no.:	(012) 401 4600
Fax no.:	(012) 401 4700

Official Use Only

Date received

2 March 2020

Reference number

PPL.sf.p.F3/334/2020

CHAPTER 1

GENERAL INFORMATION

You are required to provide the following information:

Section A: Particulars of applicant

1. Full name, where the applicant is a natural person or full registered name of the applicant; **Vopak South Africa Developments (Pty) Ltd**
2. Trading name of the applicant (if different from the registered name); **Vopak South Africa Developments (Pty) Ltd**
3. Physical and postal addresses of the principal place of business of the applicant; **(Head Office - 105 Taiwan Road, 4052 Island View Bluff, Durban, South Africa and P O Box 21030, Bluff, 4036) (Lesedi Terminal - Poortjie Road, Jameson Park, Nigel, 1492)**
4. Physical and postal address of the registered office of the applicant (if different from principal place of business); **(Head Office - 105 Taiwan Road, 4052 Island View Bluff, Durban, South Africa and P O Box 21030, Bluff, 4036) (Lesedi Terminal - Poortjie Road, Jameson Park, Nigel, 1492)**
5. Telephone number of the applicant - **0314669200** ;
6. Fax number of the applicant - **TBA**;
7. Email address of the applicant - **sandile.ntuli@vopak.com**; and
8. Details of the mandated representative at the applicant, including:
 - (a) Designation - **Terminal Manager**,
 - (b) family name - **Ntuli**,
 - (c) first name - **Sandile**,
 - (d) telephone number – **0314669200**
 - (e) fax number - **TBA**, and
 - (f) email address - **sandile.ntuli@vopak.com**

Section B: Desired commencement date

Desired commencement date of the licence applied for – **Immediately upon issue of license.**

Section C: Additional information

Provide any other information relevant to this application. **Combined license for Operation of pipeline and storage facility**

Section D: Licence conditions

State your desired licence conditions in terms of section 20(1) of the Act.

- **Vopak will abide to all conditions as set out by the Regulator.**

SECTION E: SOLEMN DECLARATION BY REQUESTER OR MANDATED REPRESENTATIVE

I (full names) Sandile NTULI.....Identity Number [REDACTED].....hereby declare that:

- (a) I am authorised by Paul COX.....to make this declaration (attach the authorisation); and
- (b) All information provided herein is within my personal knowledge and is both true and correct.

Signed at Heidelberg..... (place) on this 24th.....day of February..... (month) 2020..... (year).



Signature

I certify that the deponent:

- (a) has acknowledged that she/he knows and understands the contents of this application form and its annexures, that she/he has no objection to taking the prescribed oath and that she/he considers the oath binding on her/his conscience; and
- (b) has in the prescribed manner sworn that the contents of this application form and its annexures are true and signed same before me at (place) on this day of (month) (year).

COMMISSIONER OF OATHS

THIS IS HEREBY CERTIFIED THAT THIS IS A TRUE COPY OF THE ORIGINAL DOCUMENT AND THAT THERE IS NO INDICATION THAT ALTERATIONS HAVE BEEN MADE THERETO BY AN UNAUTHORISED PERSON.

Name

Address

Capacity


24/2/2020
Charlemayne Orson AGA (SA)
Commissioner of Oaths (RSA)
105 Talwan Road, Island View
Bluff, Durban, 4056

CHAPTER 2

DOCUMENTS OR INFORMATION TO BE SUBMITTED WITH A LICENCE APPLICATION

1. If the applicant is a natural person and a South African citizen, a certified copy of the applicant's identity document. **Attached Annexure 1**
2. In the case of a non-South African citizen, a certified copy of her/his: **N/A**
 - (a) passport;
 - (b) permanent residence permit or employment permit; and
 - (c) proof of residence in South Africa, or proof of domicile in South Africa.
3. If the applicant is: **N/A**
 - (a) a national, provincial or local government;
 - (b) another statutory body;
 - (c) a juristic person established in terms of an Act of Parliament; or
 - (d) a company or other legal body established by statute or government directive, state the proclamation or legislation establishing such a body.
4. If the applicant is not a natural person, and is not contemplated in 3 above provide –
 - (a) the title of legislation under which it is registered; **The Companies Act, No 71 of 2008**
 - (b) the registration number given to it in terms of such legislation; **2008/019455/07**
 - (c) other details relating to the entity; and
 - (d) any other information the Energy Regulator may require.
5. Where the applicant is a company provide: **Attached Annexure 2**
 - (a) certified copy of the certificate of incorporation;
 - (b) the names of current directors; and
 - (c) details regarding the ownership or shareholding structure, including particulars of the shareholders;
6. Where the applicant is a Trust as defined in the Trust Property Act, 1988 (Act No. 57 of 1988), provide: **N/A**

- (a) a certified copy of the trust deed or trust instrument and in the event of same having been amended, copies of the amended page(s) duly certified;
- (b) Letters of Administration duly certified, issued to the trustees, and if this document has been amended, then a copy of the current Letters of Administration duly certified;
- (c) certified copies of the identity documents of the trustees and beneficiaries and proof of each one's residential address;
- (d) proof of the address at which the Trust is conducting its business such as an account of the local authority for rates, taxes, electricity or water which should reflect the physical address of the Trust; and
- (e) a resolution of the trustees authorising any one or more of them to apply for the licence which reflects the names of the trustees that attended this meeting and each one's vote for or against the resolution.

7. Where the applicant has authorised another person to submit the licence application on its behalf, documentary proof of authorisation and a certified copy of the identity document of the mandated/ authorised representative of the applicant. **Attached Annexure 1**

8. Proof that the applicant is the owner of the petroleum pipeline, storage facility or loading facility. **Attached Annexure 3**

9. Where the owner of the petroleum facility is not the owner of the land on which the facility is situated, proof that the applicant is the owner of the petroleum facility and proof of authorisation to use the land. **N/A**

10. Where the facility is owned by more than one person, the applicant must provide – **This facility is solely owned by Vopak South Africa Developments (Pty) Ltd.**

- (a) details of the co-ownership and documentary proof thereof or a solemn declaration to that effect; and
- (b) written mandate from each of the other owners authorising the applicant to apply for the licence on their behalf

11. Documents demonstrating the administrative abilities of the applicant.¹ **Attached Annexure 4**
12. Documents demonstrating the financial abilities of the applicant.¹ **Attached Annexure 5**
13. Documents demonstrating the technical abilities of the applicant.¹ **Attached Annexure 4**
14. A certified copy of the Record of Decision of the relevant environmental authorities in accordance with the National Environmental Management Act, 1998 (Act No. 107 of 1998) permitting the activity for which the licence is sought, if applicable. If the Record of Decision has not been obtained, then
- (a) submit: **Attached Annexure 7**
 - (i) proof of application for such permit; or
 - (ii) a solemn declaration outlining the applicant's plans and ability to comply with all applicable labour, health and environmental legislation;
 - or
 - (b) state reason why the permit is not applicable.
15. List all applicable: **Attached Annexure 8**
- (a) legislation;
 - (b) operating and technical standards; and
 - (c) codes and specifications (including those relating to safety) to be used in the activities for which this application is made, for example:
 - (i) South African National Standards (SANS)
 - (ii) the American Society of Mechanical Engineers (ASME) Standards;
 - (iii) American Petroleum Institute (API) Standards; and
 - (iv) European Norms (EN).
16. Provide details of the petroleum that will be handled in the facility for which this application is made. **Attached Annexure 9**

¹ Only original or certified copies will be accepted by the Energy Regulator

17. Provide information required by Regulations made in terms of the Act concerning mechanisms to promote historically disadvantaged South Africans. Attached Annexure 10

We have not started scoping VSAD into our BBBEE audits.
We have only done audits for VTD so far. From 2020 onwards (i.e. to be audited in 2021 we will have the audit at VSA level)

CHAPTER 3

OPERATION OF A PETROLEUM STORAGE FACILITY (PPL.sf.F3)

Please provide the following information/documentation. Each numbered item below should be copied and appear at the top of a page with your information below.

1. A technical description of the proposed storage facility to be operated. This should include the following -
 - (a) physical address of the facility; **(Head Office - 105 Taiwan Road, 4052 Island View Bluff, Durban, South Africa and P O Box 21030, Bluff, 4036) (Lesedi Terminal - Poortjie Road, Jameson Park, Nigel, 1492)**
 - (b) GPS Coordinates: **-26.4682, 28.4225;**
 - (c) a plan layout of the storage facility to be operated: **Attached Annexure 11;**
 - (d) the diameter and height of the tanks:

Tank No.	ID	Design capacity (cbm)	Operational capacity (cbm)	Product	Tanks Type	Diameter (m)	Height (m)
TK - 001		20 000	18 000	Gasoline	Conical Roof		
TK - 002		10 000	8 000	Gasoline	Conical Roof		
TK - 003		20 000	18 000	Diesel	Conical Roof		
TK - 004		10 000	8 000	Gasoline	Conical Roof		
TK - 005		20 000	18 000	Diesel	Conical Roof		

TK - 006	20 000	18 000	Diesel	Conical Roof		
Total cbm	100 000	88 000				

; Note: Tank 8 on the Plot plan is 20 000cbm and it is a future tank with no indicated date of being brought into operation, therefore it can be excluded in this application

- (e) tank type – **See table above;**
- (f) tank identification number: **See table above;**
- (g) operational capacity **See table above**
- (h) design capacity **See table above;**
- (i) product to be stored in each tank: **See table above;**
- (j) the physical dimensions and capacity of the storage facility: **See table above;**
- (k) the rate at which product can be taken into the proposed storage facility and through what means e.g. pipeline, rail gantry, road transport gantry. Specify the number of gantries and their capacities: **2 x 16” Maximum flow rate of 1500m³/h (Import 100% pipeline);**
- (l) the rate at which product can be taken out of the proposed storage facility and through what means e.g. pipeline, rail gantry, road transport gantry. Specify the number of gantries and their capacities: **Maximum flow rate of 1500m³/h (Export – 80% road) and (20% pipeline 2 x 16” pipeline), Eight (8) road loading gantries at 125m³/h per tank;**
- (m) maps showing -
 - (i) the storage facility design and piping arrangements: **Attached Annexure 12;**
 - (ii) the proposed location of the storage facility, fences and roads: **Attached Annexure 13;**
 - (iii) where applicable, a description of the containment system and the systems to prevent overflow or leakage: **Attached Annexure 14;**
 - (iv) a description of the regular inspection and maintenance procedures: **Attached Annexure 15;** and
 - (v) where applicable, a description for handling contaminated water run-off: **Attached Annexure 14.**

2. Election of third party access to uncommitted capacity arrangements as contemplated in section 20 (1) (n) of the Act. **First come, first serve basis depending on capacity availability. Attached Annexure 16**
3. Provide information required in terms of rules 12(7) and 12(8) of these Rules. **Tariff application was submitted to NERSA on 20 December 2019.**
4. A copy of the emergency plan contemplated in section 20(1) (x) of the Act. **Attached Annexure 18**
5. A copy of the storage facility operational procedures. **Attached Annexure 19**
6. Status in terms of the National Key Points Act, 1980 (Act No. 102 of 1980). **Not registered as NKP**
7. Details of existing and proposed security arrangements. **Attached Annexure 20**
8. Development programme:
 - (a) Planned capacity of the project during the various stages of development;
Phase 1: 100 000 cbm and Phase 2: 200 000 cbm
 - (b) Schedule of implementation and minimum investment commitments for the development programme; and

Activity	Date
Phase one	
Construction License approval by NERSA	August 2010
Approval of the EIA	June 2016
Approval of the final investment proposal by Vopak's Executive Board	February 2017
Awarding the EPC contract	September 2017
Construction start	January 2018
Project commissioning	August 2019
Phase two	
Begin phase two construction	August 2022

- (c) Deadline to commence service for each stage contemplated. **See table above**
10. A copy of the maintenance policy for the storage facility. **Attached Annexure 21**

OPERATION OF A PETROLEUM PIPELINE (PPL.p.F3)

1. A technical description of the pipeline adequately specifying:

(a) the route(s);

Attached – Annexure 28

4 x 16" pipeline from Vopak manifold to Transnet manifold, +/- 300 meters diagonally

(b) GPS coordinates (of the inlet and outlet flanges);

Attached – Annexure 28

(c) diameter(s);

Attached – Annexure 28

4 x 16" pipeline

(d) planned pumping stations;

Attached - Annexure 27

Vopak Terminal and Transnet Jameson Park

(e) receiving and launching stations;

The pig receivers are on Lesedi Terminal and there are removable pig launchers for the TM2 side. One for petrol and one for diesel. Attached – Annexure 25 (a) & (b)

(f) installed design capacity;

Design capacity 102 000m3

(g) initial capacity;

Commissioning capacity 3500m3

(h) receipt and delivery points;

Attached – Annexure 29

Receipt can be from Transnet JMP or NMPP and delivery will only be from Vopak into Transnet JMP

(i) connections with other pipeline systems;

The receipt line is connected to NMPP and Transnet JMP accumulators and the delivery line is connected to Transnet JMP booster pumps

(j) auxiliary equipment like accumulation and inter mixture tanks; and

Attached - Annexure 26 (a) & (b)

(k) control and communication system.

YOKOGAWA DCS, SAAB, ESD, Radio, Telephone and Mobile

2. Detailed maps and diagrams as appropriate;

Attached P&ID's

3. A description of the mechanical properties and condition of the pipeline;

New, parts are yet to be installed

4. The results of any programmes, surveys or studies that indicate the present condition of the pipeline;

Condition of the pipeline is new

5. Provisions for metering, including type of meters, accuracy and calibration arrangements;

JMP(Transnet) provides meters and provers, Vopak utilises Coriolis metering system and maintenance & calibrations are outsourced to industry specialists

6. Provide information required in terms of the NERSA Tariff Methodology for the Petroleum Pipeline Industry to enable the Energy Regulator to set the tariffs for this pipeline;

Information provided on Tariff Application

7. A copy of the emergency plan contemplated in section 20 (1) (x) of the Act;

Attached – Annexure 18

8. A copy of the operational procedure for the pipeline;

Attached – Annexure 19

9. Status in terms of the National Key Points Act, 1980 (Act No. 102 of 1980);

Not registered in terms of the National Key Point Act

10. Details of existing and proposed security arrangements;

Attached – Annexure 20

11. Development Plans:

(a) Investment and development plan including nature, schedule and quantum of each investment; and

Information provided on Tariff Application

(b) Planned changes to pipeline capacity and the dates when changes will become operational

No changes applicable to pipeline capacity

12. A copy of the maintenance policy for the petroleum pipeline

Attached – Annexure 15

The following documents were deemed confidential and not attached in this public copy:

1. Annexure 1 – ID Document of mandated representative
2. Annexure 2 – ID numbers and directors addresses
 - Share certificate
3. Annexure 4 – Staff details
4. Annexure 14, 25 to 29 – Drawings
5. Annexure 15 and 21 – Maintenance Procedure
6. Annexure 18 – Emergency Response Plan
7. Annexure 19 – Operating Procedures
8. Annexure 20 – Security Details

Vopak Terminal Durban (Pty) Ltd
Taiwan Road, Island View,
4052 Durban, Rep. of South Africa
P.O. Box 21030
Bluff, 4036 Durban
Rep. of South Africa

ANNEXURE 1



Telephone + 27 31 466-9200

Fax + 27 31 466-9272 (ADMIN)

Fax + 27 31 466-9274 (COMMERCIAL)

Company Register 1996/011237/07

To: **NATIONAL ENERGY REGULATOR OF SOUTH AFRICA**
Att: **MARTIN UNTIEDT**
Cc:
From: **PAUL COX**
Department: **MANAGING DIRECTOR**
Total Pages (incl. this page)
Subject: **OPERATION OF THE PETROLEUM STORAGE FACILITY
AND PIPELINE IN LESEDI**

Our Reference	tel. direct +27 31 466 9202	fax direct +27 31 466 9272	Date 07 March 2019
---------------	---------------------------------------	--------------------------------------	------------------------------

This serves to confirm that Sandile Ntuli (Terminal Manager), has been mandated by myself, Paul Cox (Managing Director), to apply for a license to operate. This is in term of the Petroleum Pipeline Act, 2003 (Act No. 60 of 2003).

This submission is on behalf of Vopak South Africa Development (Pty) Ltd.

Yours sincerely,

A handwritten signature in black ink, appearing to be "Paul Cox", with a long horizontal stroke extending to the right.

PAUL COX
MANAGING DIRECTOR

A Royal Vopak company

Directors: L. Mehlomakulu, JB Schutrops*, M. Gilsing*, P. Cox* (Managing), Z Cain

*Dutch



Companies and Intellectual
Property Commission

a member of **tan-di** group

Disclosure Certificate: Companies and Close Corporations

Registration Number: 2008 / 019455 / 07

Enterprise Name: VOPAK SOUTH AFRICA DEVELOPMENTS (RF)

ENTERPRISE INFORMATION

Registration Number 2008 / 019455 / 07
Enterprise Name VOPAK SOUTH AFRICA DEVELOPMENTS (RF) (PTY) LTD
Registration Date 15/08/2008
Business Start Date 15/08/2008
Enterprise Type Private Company
Enterprise Status In Business
Compliance Status Compliant
Financial Year End December
TAX Number 9014033220

Addresses

POSTAL ADDRESS

P O BOX 21030
BLUFF

4036

ADDRESS OF REGISTERED OFFICE

105 TAIWAN ROAD
ISLAND VIEW
DURBAN

4052

ACTIVE MEMBERS / DIRECTORS

Surname and First Names	Type	ID Number / Date of Birth	Contrib. (R)	Interest (%)	Appoint. Date	Address
MEHLOMAKULU, LULAMA SIMPHIWE	Director	[REDACTED]	0.00	0.00	28/08/2008	[REDACTED]
GILSING, MICHAEL EVERHARDUS GERHARDUS	Director	[REDACTED]	0.00	0.00	01/03/2012	[REDACTED]
COX, PAUL	Director	[REDACTED]	0.00	0.00	22/01/2016	[REDACTED]
SCHUTROPS, JAN BERT	Director	[REDACTED]	0.00	0.00	20/11/2017	[REDACTED]





Companies and Intellectual
Property Commission

a member of the dti group

Disclosure Certificate: Companies and Close Corporations

Registration Number: 2008 / 018455 / 07

Enterprise Name: VOPAK SOUTH AFRICA DEVELOPMENTS (RF)

CAIN, ZAMEKA	Director	[REDACTED]	0.00	0.00	21/08/2018	[REDACTED]
HOLTON, CHRISTOPHER JOHN	Company Secretary	[REDACTED]	0.00	0.00	28/01/2015	[REDACTED]

AUDITOR DETAILS

Auditor Name	Type	Status	Appointment Date	Resignation Date	Email Address
PRICEWATERHOUSE COOPER	Auditor	Resign		2015-05-26	[REDACTED]

Profession Number: 905178E

DELOITTE & TOUCHE	Auditor	Current		ACTIVE	
-------------------	---------	---------	--	--------	--

Profession Number: 901458E

ANDREW KILPATRICK	Designated Auditor	Current		ACTIVE	
-------------------	--------------------	---------	--	--------	--

Profession Number: 901458E

CHANGE SUMMARY

15/08/2008	Registration of CC/CO on 15/08/2008.
26/08/2008	Name Change on 26/08/2008. MATRESKA INVESTMENTS
26/08/2008	Principle Business Change on 26/08/2008. 62
19/09/2008	Member Change on 26/08/2008. Surname=MARSHALL Full ForeNames=DIANE LOUISE Id No=[REDACTED] Status :RESIGNEDNature of Change=DIRECTOR RESIGNED
19/09/2008	Member Change on 26/08/2008. Surname=HOPA Full ForeNames=JONGISIZWE Id No=[REDACTED] Status :ACTIVENature of Change=NON-EXECUTIVE DIRECTOR
19/09/2008	Member Change on 26/08/2008. Surname=MEHLOMAKULU Full ForeNames=LULAMA SIMPHIWE Id No=[REDACTED] Status :ACTIVENature of Change=NEW APPOINTMENT
19/09/2008	Member Change on 26/08/2008. Surname=NOORDHOEK-HEGT Full ForeNames=MARK DIEDERIK Id No=[REDACTED] Status :ACTIVENature of Change=NEW APPOINTMENT



**Certificate issued by the Commissioner of Companies & Intellectual
Property Commission on Tuesday, September 4, 2018 at 8:02**



Companies and Intellectual
Property Commission

a member of the dti group

Disclosure Certificate: Companies and Close Corporations

Registration Number: 2008 / 018485 / 07

Enterprise Name: VOPAK SOUTH AFRICA DEVELOPMENTS (RF)

19/09/2008 Member Change on 26/08/2008.
Surname=SESSIONS
Full ForeNames=MARK LESLIE GRIFFITH
Id No- [REDACTED]
Status :ACTIVENature of Change=NEW APPOINTMENT

19/09/2008 Member Change on 26/08/2008.
Surname=MARSHALL
Full ForeNames=DIANE LOUISE
Id No- [REDACTED]
Status :RESIGNEDNature of Change=DIRECTOR RESIGNED

19/09/2008 Member Change on 26/08/2008.
Surname=HOPA
Full ForeNames=JONGISIZWE
Id No- [REDACTED]
Status :ACTIVENature of Change=NON-EXECUTIVE DIRECTOR

19/09/2008 Member Change on 26/08/2008.
Surname=MEHLOMAKULU
Full ForeNames=LULAMA SIMPHIWE
Id No- [REDACTED]
Status :ACTIVENature of Change=NEW APPOINTMENT

19/09/2008 Member Change on 26/08/2008.
Surname=NOORDHOEK-HEGT
Full ForeNames=MARK DIEDERIK
Id No- [REDACTED]
Status :ACTIVENature of Change=NEW APPOINTMENT

19/09/2008 Member Change on 26/08/2008.
Surname=SESSIONS
Full ForeNames=MARK LESLIE GRIFFITH
Id No- [REDACTED]
Status :ACTIVENature of Change=NEW APPOINTMENT

19/09/2008 Member Change on 26/08/2008.
Surname=MARSHALL
Full ForeNames=DIANE LOUISE
Id No- [REDACTED]
Status :RESIGNEDNature of Change=DIRECTOR RESIGNED

19/09/2008 Member Change on 26/08/2008.
Surname=HOPA
Full ForeNames=JONGISIZWE
Id No- [REDACTED]
Status :ACTIVENature of Change=NON-EXECUTIVE DIRECTOR

19/09/2008 Member Change on 26/08/2008.
Surname=MEHLOMAKULU
Full ForeNames=LULAMA SIMPHIWE
Id No- [REDACTED]
Status :ACTIVENature of Change=NEW APPOINTMENT

19/09/2008 Member Change on 26/08/2008.
Surname=NOORDHOEK-HEGT
Full ForeNames=MARK DIEDERIK
Id No- [REDACTED]
Status :ACTIVENature of Change=NEW APPOINTMENT

19/09/2008 Member Change on 26/08/2008.
Surname=SESSIONS
Full ForeNames=MARK LESLIE GRIFFITH
Id No- [REDACTED]
Status :ACTIVENature of Change=NEW APPOINTMENT

02/02/2010 Member Change on 10/08/2008.
Surname=NOORDHOEK-HEGT
Full ForeNames=MARK DIEDERIK
Id No- [REDACTED]
Status :RESIGNEDNature of Change=RESIGNED

02/02/2010 Member Change on 10/08/2008.

Physical Address

the dti Campus - Block F
77 Meintjies Street
Sunnyside 0001

Postal Address: Companies

P O Box 429
Pretoria
0001

Docex: 256

Web: www.cipc.co.za

Contact Centre: 086 100 2472 (CIPC)

Contact Centre (International): +27 12 394 9573



**Certificate issued by the Commissioner of Companies & Intellectual
Property Commission on Tuesday, September 4, 2018 at 8:02**



Companies and Intellectual
Property Commission

a member of the dti group

Registration Number: 2008 / 019455 / 07

Enterprise Name: VOPAK SOUTH AFRICA DEVELOPMENTS (RF)

Disclosure Certificate: Companies and Close Corporations

Surname=VAN DE KAR
Full ForeNames=MARCEL HENDRICUS LEONARDUS
Id No=[REDACTED]
Status :ACTIVENature of Change=NEW APPOINTMENT
21/05/2012 Member Change on 21/05/2012.
Authorising Director DetailsDirector Full ForeNames=JONGISIZWE
Surname=HOPA
ID Number=[REDACTED]
Customer Details
Director Full ForeNames=DYMES
Surname=KATHARD
ID Number=[REDACTED]
21/05/2012 Member Change on 21/05/2012.
Authorising Director DetailsDirector Full ForeNames=JONGISIZWE
Surname=HOPA
ID Number=[REDACTED]
28/05/2012 Member Change on 28/05/2012.
Unlock PasswordUnlocked byLKZ39Password successfully sent to sizwe@reatile.co.za
28/05/2012 Member Change on 28/05/2012.
Unlock PasswordUnlocked byLKZ39Password successfully sent to mark.sessions@vopak.com
29/05/2012 Member Change on 01/03/2011.
Full ForeNames=NOMBUSO NORAH
Surname=AFOLAYAN
AppointmentDate=01/03/2011
Status=A
29/05/2012 Member Change on 01/03/2012.
Full ForeNames=FRANKWIN ERIK
Surname=ERKLENS
AppointmentDate=01/03/2012
Status=A
29/05/2012 Member Change on 01/03/2012
Full ForeNames=MICHAEL EVERHARDUS GERHARDUS
Surname=GILSING
AppointmentDate=01/03/2012
Status=A
15/01/2013 Status changed to Unknown
Added Ring Fence Condition
18/07/2013 Member Change on 18/07/2013.
Authorising Director DetailsDirector Full ForeNames=MARK LESLIE GRIFFITH
Surname=SESSIONS
ID Number=[REDACTED]
Customer Details
Director Full ForeNames=DYMES
Surname=KATHARD
ID Number=[REDACTED]
18/07/2013 Member Change on 18/07/2013.
Authorising Director DetailsDirector Full ForeNames=MARK LESLIE GRIFFITH
Surname=SESSIONS
ID Number=[REDACTED]
31/07/2013 Member Change on 31/07/2013.
Unlock PasswordUnlocked byMLB39Password successfully sent to mark.sessions@vopak.com
31/07/2013 Member Change on 10/08/2009.
Full ForeNames=MARCEL HENDRICUS LEONARDUS
Surname=VAN DE KAR
AppointmentDate=10/08/2009
Status=C
31/07/2013 Member Change on 01/07/2013.

Page 4 of 7

Physical Address

the dti Campus - Block F
77 Meintjies Street
Sunnyside 0001

Postal Address: Companies

P O Box 429
Pretoria
0001

Docex: 258

Web: www.cipc.co.za

Contact Centre: 086 100 2472 (CIPC)

Contact Centre (International): +27 12 394 9573



**Certificate issued by the Commissioner of Companies & Intellectual
Property Commission on Tuesday, September 4, 2018 at 8:02**



Companies and Intellectual
Property Commission

a member of the dti group

Disclosure Certificate: Companies and Close Corporations

Registration Number: 2008 / 019455 / 07

Enterprise Name: VOPAK SOUTH AFRICA DEVELOPMENTS (RF)

Full ForeNames=ERIK WILLEM
Surname=KLEINE
AppointmentDate=01/07/2013
Status=A

09/08/2013 Postal Address Change on 25/07/2013.
P O BOX 1049
DURBAN

09/08/2013 4000
Registered Address Change on 25/07/2013.
102 ESSENWOOD ROAD
DURBAN

09/08/2013 4001
Postal Address Change on 25/07/2013.
P O BOX 21030
BLUFF

09/08/2013 4036
Registered Address Change on 25/07/2013.
105 TAIWAN ROAD
ISLAND VIEW
DURBAN

23/08/2013 4052
Status changed to Unknown.

30/09/2013 Annual Return completed on 30/09/2013.
Company / Close Corporation AR Filing - Web Services - Ref No : 58242200

14/01/2015 Annual Return completed on 14/01/2015
Company / Close Corporation AR Filing - Web Services - Ref No : 623865430

24/02/2015 Member Change on 18/02/2015
Change Record
Surname = HOLTON
First Names = CHRISTOPHER JOHN
Status = Active

12/03/2015 Member Change on 12/03/2015.
Director JONGISIZWE HOPA details was Changed

12/03/2015 Member Change on 12/03/2015.
Director LULAMA SIMPHIWE MEHLOMAKULU details was Changed

12/03/2015 Member Change on 12/03/2015.
Director NOMBUSO NORAH AFOLAYAN details was Changed

12/03/2015 Member Change on 12/03/2015.
Director FRANKWIN ERIK ERKLENS details was Changed

12/03/2015 Member Change on 12/03/2015.
Director MICHAEL EVERHARDUS GERHARDUS GILSING details was Changed

12/03/2015 Member Change on 12/03/2015.
Director ERIK WILLEM KLEINE details was Changed

28/06/2015 Accounting Officer Change on 26/06/2015.
Notice of change of company officials - Resigned

06/07/2015 Accounting Officer Change on 02/07/2015.
Change Record
Name : = DELOITTE & TOUCHE
Status : = Current

Page 6 of 7

Physical Address

the dti Campus - Block F
77 Meintjies Street
Sunnyside 0001

Postal Address: Companies

P O Box 429
Pretoria
0001

Docex: 256

Web: www.cipc.co.za

Contact Centre: 086 100 2472 (CIPC)

Contact Centre (International): +27 12 394 9573



**Certificate issued by the Commissioner of Companies & Intellectual
Property Commission on Tuesday, September 4, 2018 at 8:02**



Companies and Intellectual
Property Commission

a member of the dti group

Registration Number: 2008 / 019455 / 07

Enterprise Name: VOPAK SOUTH AFRICA DEVELOPMENTS (RF)

06/07/2015 Accounting Officer Change on 02/07/2015.
Change Record
Name : = ANDREW KILPATRICK
Status : = Current

06/07/2015 Member Change on 06/07/2015.
Director DICK MEURS was added

06/07/2015 Member Change on 06/07/2015.
Director LULAMA SIMPHIWE MEHLOMAKULU details was Changed

06/07/2015 Member Change on 06/07/2015.
Director FRANKWIN ERIK ERKLENS details was Changed

06/07/2015 Member Change on 06/07/2015.
Director MICHAEL EVERHARDUS GERHARDUS GILSING details was Changed

06/07/2015 Member Change on 06/07/2015.
Director ERIK WILLEM KLEINE details was Changed

26/08/2015 SMS Notification that Annual Return is due was sent on 26/08/2015.
E-Mail sent to LULAMA SIMPHIWE MEHLOMAKULU for 2015

26/08/2015 SMS Notification that Annual Return is due was sent on 26/08/2015.
E-Mail sent to MICHAEL EVERHARDUS GERHARDUS GILSING for 2015

26/08/2015 SMS Notification that Annual Return is due was sent on 26/08/2015.
E-Mail sent to ERIK WILLEM KLEINE for 2015

26/08/2015 SMS Notification that Annual Return is due was sent on 26/08/2015.
E-Mail sent to DICK MEURS for 2015

26/08/2015 Annual Return completed on 26/08/2015
Company / Close Corporation AR Filing - Web Services : Ref No. : 528821114

28/01/2016 Member Change on 28/01/2016
Director PAUL COX was added

28/01/2016 Member Change on 28/01/2016.
Director DICK MEURS details was Changed

28/01/2016 Member Change on 28/01/2016
Director ERIK WILLEM KLEINE details was Changed

28/01/2016 Member Change on 28/01/2016.
Director MICHAEL EVERHARDUS GERHARDUS GILSING details was Changed

28/01/2016 Member Change on 28/01/2016.
Director LULAMA SIMPHIWE MEHLOMAKULU details was Changed

02/03/2016 Change of Financial Year End on 02/03/2016.
The financial year end was changed from February 2016 to December 2016

04/08/2016 Email Notification that Annual Return is due was sent on 04/08/2016.
E-Mail sent to LULAMA SIMPHIWE MEHLOMAKULU for 2016

04/08/2016 Email Notification that Annual Return is due was sent on 04/08/2016.
E-Mail sent to MICHAEL EVERHARDUS GERHARDUS GILSING for 2016

04/08/2016 Email Notification that Annual Return is due was sent on 04/08/2016.
E-Mail sent to DICK MEURS for 2016

04/08/2016 Email Notification that Annual Return is due was sent on 04/08/2016.
E-Mail sent to PAUL COX for 2016

17/08/2016 Annual Return completed on 17/08/2016.
Company / Close Corporation AR Filing - Web Services : Ref No. : 547077223

04/08/2017 Email Notification that Annual Return is due was sent on 04/08/2017.
E-Mail sent to LULAMA SIMPHIWE MEHLOMAKULU for 2017

Page 6 of 7

Physical Address

the dti Campus - Block F
77 Meintjies Street
Sunnyside 0001

Postal Address: Companies

P O Box 429
Pretoria
0001

Docex: 256

Web: www.cipc.co.za

Contact Centre: 086 100 2472 (CIPC)

Contact Centre (International): +27 12 394 9573



**Certificate issued by the Commissioner of Companies & Intellectual
Property Commission on Tuesday, September 4, 2018 at 8:02**



Companies and Intellectual
Property Commission

a member of the dti group

Disclosure Certificate: Companies and Close Corporations

Registration Number: 2008 / 019455 / 07

Enterprise Name: VOPAK SOUTH AFRICA DEVELOPMENTS (RF)

04/08/2017 Email Notification that Annual Return is due was sent on 04/08/2017.
E-Mail sent to MICHAEL EVERHARDUS GERHARDUS GILSING for 2017

04/08/2017 Email Notification that Annual Return is due was sent on 04/08/2017.
E-Mail sent to DICK MEURS for 2017

04/08/2017 Email Notification that Annual Return is due was sent on 04/08/2017.
E-Mail sent to PAUL COX for 2017

26/10/2017 Annual Return completed on 26/10/2017.
Company / Close Corporation AR Filing - Web Services : Ref No. : 589701313

04/12/2017 Member Change on 04/12/2017.
Director JAN BERT SCHUTROPS was added

04/12/2017 Member Change on 04/12/2017.
Director LULAMA SIMPHIWE MEHLOMAKULU details was Changed

04/12/2017 Member Change on 04/12/2017.
Director MICHAEL EVERHARDUS GERHARDUS GILSING details was Changed

04/12/2017 Member Change on 04/12/2017.
Director DICK MEURS details was Changed

04/12/2017 Member Change on 04/12/2017.
Director PAUL COX details was Changed

22/08/2018 Annual Return completed on 22/08/2018.
Company / Close Corporation AR Filing - Web Services : Ref No. : 5135877805

04/09/2018 Member Change on 04/09/2018.
Director ZAMEKA CAIN was added

04/09/2018 Member Change on 04/09/2018.
Director LULAMA SIMPHIWE MEHLOMAKULU details was Changed

04/09/2018 Member Change on 04/09/2018.
Director MICHAEL EVERHARDUS GERHARDUS GILSING details was Changed

04/09/2018 Member Change on 04/09/2018.
Director PAUL COX details was Changed

04/09/2018 Member Change on 04/09/2018.
Director JAN BERT SCHUTROPS details was Changed

Page 7 of 7

Physical Address

the dti Campus - Block F
77 Meintjies Street
Sunnyside 0001

Postal Address: Companies

P O Box 429
Pretoria
0001

Docex: 256


Web: www.cipc.co.za

Contact Centre: 086 100 2472 (CIPC)

Contact Centre (International): +27 12 394 9573



VOPAK SOUTH AFRICA GROUP STRUCTURE

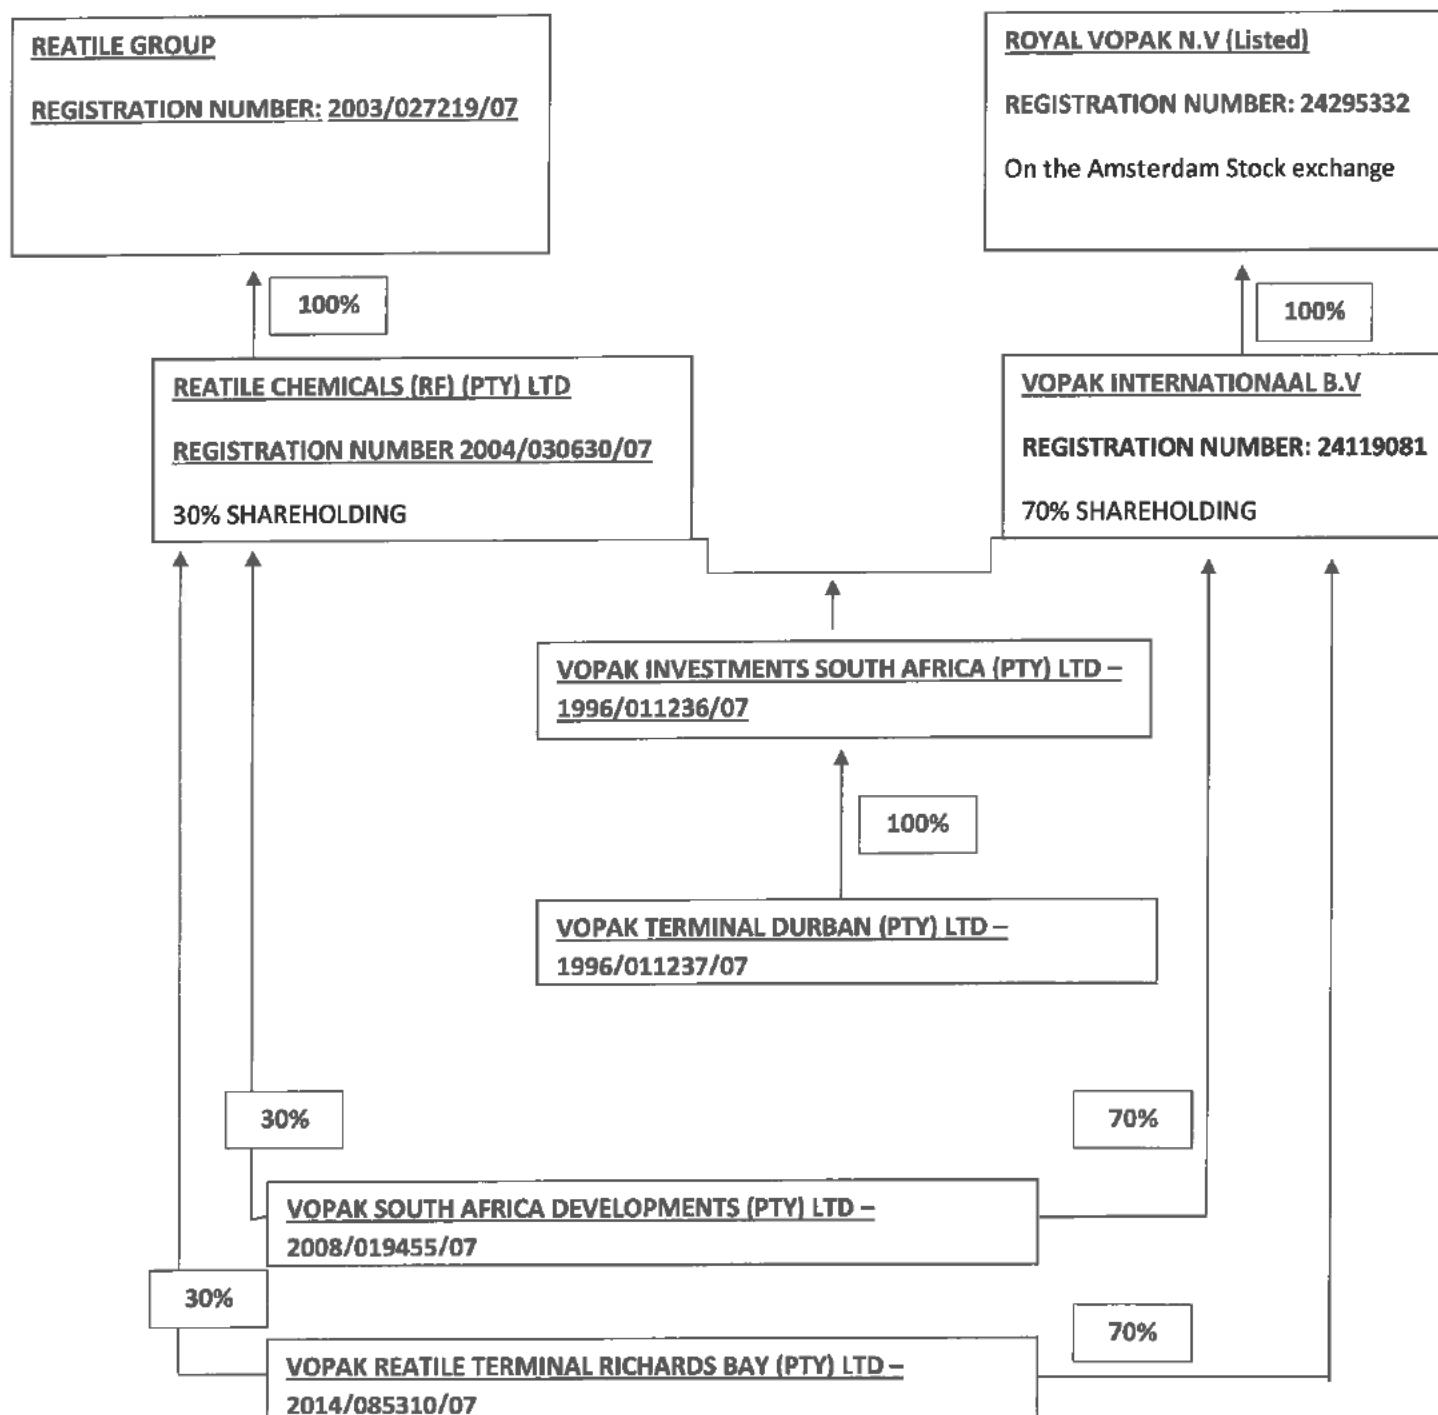

1999

Original

DEED OF TRANSFER NO. T
IFO

VOPAK SOUTH AFRICA DEVELOPMENTS (PROPRIETARY) LIMITED

OVER

**PORTION 23 (A PORTION OF THE REMAINING EXTENT OF PORTION 7)
OF FARM THE MARAISDRIFT 190 IR**



MASHAU-NALEDZANI ATTORNEYS


Notaries & Conveyancers

Tel No.: 0861 333 235

Email: admin@mashau-naledzani.co.za

1999

Mashau Naledzani Attorneys
No.279 Columbine Avenue
Mondeor
JOHANNESBURG



Prepared by me

CONVEYANCER
MUDZHADZHI SELINAH NALEDZANI

T 000028168 / 2018

DEED OF TRANSFER

BE IT HEREBY MADE KNOWN THAT

NAKKIE DU TOIT

appeared before me, REGISTRAR OF DEEDS at PRETORIA, he the said
Appearer being duly authorised thereto by a Power of Attorney signed
at JOHANNESBURG on 24 January 2018 and granted to him by

REATILE GROUP (PROPRIETARY) LIMITED
REGISTRATION NUMBER: 2003/027219/07

4

And the Appearer declared that his said principal had truly and legally sold on 4 October 2017 and that he, the said Appearer, in his capacity aforesaid, did, by these presents, cede and transfer to and on behalf of

VOPAK SOUTH AFRICA DEVELOPMENTS (PROPRIETARY) LIMITED
REGISTRATION NUMBER: 2008/019455/07

its Successors in Title or assigns, in full and free property

PORTION 23 (A PORTION OF THE REMAINING EXTENT OF PORTION 7)
OF THE FARM MARAISDRIFT 190 IR

REGISTRATION DIVISION I.R.; PROVINCE OF GAUTENG

MEASURING [REDACTED]
Hectares

FIRST REGISTERED by Certificate of Registered Title Number
T7250/2017 with Diagram SG No. 3371/2015 annexed thereto and
held by Deed of Transfer Number T27133/2017

SUBJECT to the following conditions: -

- A. The former Remaining Extent of Portion 7 of the farm MARAISDRIFT 190, Registration Division I.R.; Transvaal, measuring as such [REDACTED] hectares (of which the property hereby transferred forms a portion) is subject to the following conditions:
1. The right in favour of VICTORIA FALLS AND TRANSVAAL POWER COMPANY LIMITED to convey electricity over the property, together with ancillary rights, and subject to conditions as will more fully appear from Notarial Deed 356/1938S, registered on the 23rd March 1939.
 2. The right in favour of ELECTRICITY SUPPLY COMMISSION to convey electricity over the property and to ancillary rights, and subject to conditions as will more fully appear from Notarial Deed 1025/1940S registered on the 11th day of September 1940.
- B. The Remaining Extent of Portion 7 of the farm MARAISDRIFT 190, Registration Division I.R.; Transvaal, measuring as such [REDACTED] hectares, is entitled to and subject on the following conditions namely:
1. Entitled to a pipe line servitude [REDACTED] metres in width over Portion 13 (a portion of Portion 7) of the said farm MARAISDRIFT 190, Registration Division I.R.; Transvaal, measuring [REDACTED] hectares, held by the TOWN COUNCIL OF NIGEL under Deed of Transfer 18437/1946 dated 22nd day of June 1946 as will more fully appear from servitude

diagram SG No A2257/1945 annexed to Notarial Deed of Servitude 96/1964S registered on the 27th January 1964.

- C. Subject to the right in favour of the ELECTRICITY SUPPLY COMMISSION to convey electricity over the property, together with ancillary rights, as will more fully appear from Notarial Deed K1716/1976S registered on the 17th June 1976.
- D. Portions of the Remaining Extent of Portion 7 of the farm MARAISDRIFT 190 Registration Division I.R.; Transvaal, measuring together in extent [REDACTED] hectares which form part of the land as defined by Diagram RMT No M115/68 (SG No. B30/68) are in terms of Section 40 of Act No. 20 of 1967 proclaimed land as will more fully appear from MT 202/298 registered in the Office of the Registrar of Mining Titles Johannesburg on the 27th January 1970.
- E. By Notarial Deed K777/1982-S the right has been granted to ESKOM to convey electricity over the property hereby convey together with ancillary rights, and subject to conditions as will more fully appear on reference to the said Notarial Deed and Diagram.
- F. And further subject to the following servitudes:

"The property hereby transferred is subject to a perpetual servitude for the conveyance and treatment of sewerage from Jameson Park Township and Kaydale Township in favour of the transferor, its successors in title or assigns in its capacity as township owner of:

1. Portion 8 (a portion of Portion 1) of the Farm Klippoortjie 187, Registration Division I.R., Transvaal Measuring [REDACTED] hectares Held by Deed of Transfer No. T59124/1980 Now known as KAYDALE TOWNSHIP.
2. Remaining Extent of Portion 11 (a portion of portion 7) of the farm MARAISDRIFT 190 Registration Division IR Transvaal Measuring [REDACTED] hectares Held by Deed of Transfer No. T31319/1977 Now known as JAMESON PARK TOWNSHIP

Which servitude will be defined on a servitude diagram to be prepared by the transferor at its costs as soon as possible after transfer of the property and which diagram will be registered in terms of a Notarial Deed of Amendment to be prepared by and at the cost of the transferor.

- G. By Notarial Deed K5515/1991 the right has been granted to ESKOM to convey electricity over the property hereby conveyed together with ancillary rights, and subject to conditions, as will more fully appear on reference to said Notarial Deed, grosse whereof is hereto annexed.

4

10

H. The property is further subject to a Pipeline Servitude in favour of Transnet Limited, as will appear from reference to a Deed of Servitude No. K707/1973S as indicated by the figure As2s1EA on Diagram S.G. No.3371/2015.

I. The property is further subject a Pipeline Servitude in favour of Transnet Limited, as will appear from reference to a, Deed of Servitude No. K2767/1981s as indicated by the figure As2s1EA on Diagram S.G. No.3371/2015.

SUBJECT to such conditions as are mentioned or referred to in the aforesaid Deed/s.

WHEREFORE the Appearer, renouncing all rights and title which the said

REATILE GROUP (PROPRIETARY) LIMITED
REGISTRATION NUMBER: 2003/027219/07

heretofore had to the premises, did in consequence also acknowledge it to be entirely dispossessed of, and disentitled to the same, and that by virtue of these presents, the said

VOPAK SOUTH AFRICA DEVELOPMENTS (PROPRIETARY) LIMITED
REGISTRATION NUMBER: 2008/019455/07

its Successors in Title or Assigns, now is and henceforth shall be entitled thereto, conformably to local custom, the State, however reserving its rights, and finally acknowledging the purchase price to be the sum of

[REDACTED]

10

4

Press Release.

Vopak expands further in South Africa

Rotterdam, the Netherlands, 17 February 2017

Today Royal Vopak and its partner Reatile announce that the investment decision has been taken to further expand their activities in South Africa. In line with previous expansions this investment aims to enhance Vopak's infrastructure to help meet South Africa's increasing demand for petroleum products. It will improve the security of fuel supply by facilitating the import of cleaner fuels into South Africa. The expansion comprises the following two projects:

- A new 100,000 cbm inland terminal in the Gauteng province (Johannesburg) connected to Vopak Terminal Durban via the Transnet Multi Product Pipeline.
- An expansion of Vopak Terminal Durban with 130,000 cbm.

The new state-of-the art inland terminal will be built in Lesedi, located in the Gauteng province (Johannesburg). The new terminal will consist of six tanks of in total 100,000 cbm, eight truck loading bays with a vapour recovery system and a pipeline connection to the state-owned New Multi Product Pipeline (NMPP) for refined petroleum products (petrol and diesel). The NMPP is running from the Port of Durban to Gauteng where currently around 70% of South Africa's fuel demand is concentrated. The pipeline reduces the need for road transport from Durban to Gauteng with trucks, giving customers a more cost-effective, scalable, safe and environmentally friendly way to supply this important region. Vopak Terminal Durban and Vopak Terminal Lesedi will be the first major open access independent tank terminals connected to the NMPP, connecting the Port of Durban with the Gauteng province.

The expansion of Vopak Terminal Durban will comprise 10 new state-of-the art tanks with a total capacity of 162,000 cbm as well as the demolition of 38 older small tanks. The net increase in capacity will be 130,000 cbm. Furthermore, investments will also be made in three additional truck loading bays connected to the existing vapour recovery system, additional (berth) pipelines and a new marine loading arm. Upon completion, the total capacity of Vopak Terminal Durban will amount to 371,926 cbm.

[Link to news release about previous expansion in South Africa](#)

Vopak Terminal Durban (Pty) Ltd. is a partnership between Royal Vopak (70%) and Reatile Chemicals (30%). Vopak Terminal Durban is well connected via pipelines to the (refining) industry in the Port of Durban.

Profile Vopak

Royal Vopak is the world's leading independent tank storage provider for the oil and chemical industry. As of 17 February 2017, Vopak operates 67 terminals in 25 countries with a combined storage capacity of 34.7 million cbm, with another 3.8 million cbm under development, to be added before the end of 2019. Vopak's purpose is to store vital products with care. Vopak provides safe, efficient and clean storage and handling services of bulk liquid products and gases at key marine locations that are critical to its customers around the world. The majority of its customers are companies operating in the oil, chemicals and gas sector, for which Vopak stores a large variety of products destined for a wide range of industries. Vopak's strategic focus is on four categories of terminals: Major hubs supporting intercontinental products flows, Terminals facilitating growth in global gas markets, Import distribution terminals in major markets with structural deficits, Industrial and chemicals terminals in the Americas, the Middle East and Asia.

Profile Reatile Chemicals

Reatile Chemicals (Pty) Limited is part of the Reatile Group; a black-owned and managed investment holding company formed in 2003. The founding members of Reatile, through their family trusts, maintain a controlling stake in the group, which ensures that they are focused exclusively on the fulfilment of its vision and strategic objectives. Reatile Group has three main focus areas: mining services, energy and petrochemicals. The founding members are all engineers with extensive careers and executive experience in these chosen sectors.

For more information, please contact:**Press**

Liesbeth Lans, Manager External Communication,
Telephone : +31 (0)10 4002777, e-mail: global.communication@vopak.com

Analysts and investors

Chiel Rietvelt, Head of Investor Relations,
Telephone : +31 (0)10 4002776, e-mail: investor.relations@vopak.com



GAUTENG PROVINCE

AGRICULTURE AND RURAL DEVELOPMENT
REPUBLIC OF SOUTH AFRICA

CERTIFIED A TRUE COPY
OF THE ORIGINAL

Reference: 002/12-13/E0102
Enquiries: Lenni Motha
Telephone: (011) 240 3186
Email: Lenni.Motha@gauteng.gov.za

Marcel van de Kar
Vopak South Africa Developments (Proprietary) Limited
Vopak Terminal Durban
105 Taiwan Road
Island View Bluff
DURBAN
4052

Tel: (031) 466 9221
Fax: (031) 466 9272

PER FACSIMILE & REGISTERED MAIL

Dear Sir/Madam

APPLICATION FOR ENVIRONMENTAL AUTHORISATION FOR THE PROPOSED VOPAK REATILE BULK PETROLEUM STORAGE AND DISTRIBUTION FACILITY IN HEIDELBURG, LESEDI LOCAL MUNICIPALITY

The Department has decided to grant authorisation. The environmental authorisation and reasons for the decision are attached herewith.

In terms of regulation 10(2) of the Environmental Impact Assessment Regulations, 2010 ("the regulations"), you are to notify all registered interested and affected parties, in writing and within ten (10) calendar days of the date of this letter, of the Department's decision in respect of your application as well as the provisions regarding the making of appeals that are provided for in the regulations.

Your attention is drawn to Chapter 7 of the Regulations which regulates appeal procedures. Should you wish to appeal any aspect of the decision, you must, *inter alia*, lodge a notice of intention to

GDARD
Office of the EOD
14-05-21 000031

ALEXA J. HELM CA (SA)
COMMISSIONER OF OATHS
SAICA No.: 20017682
105 TAIWAN ROAD, ISLAND VIEW
BLUFF, DURBAN, 4056
23/02/2016



GAUTENG PROVINCE

AGRICULTURE AND RURAL DEVELOPMENT
REPUBLIC OF SOUTH AFRICA

GDARD
Office of the MEC
'14 -25-24
000037

Environmental Authorisation

Authorisation register number: 002/12-13/E0102

Holder of authorisation: *Vopak South Africa
Developments (Proprietary)
Limited*

Location of activity: *T0IR00000000019000007,
Heidelberg, Lesedi Local
Municipality*

Conditions

GDARD
Office of the EOD

14-03-24

000037

Scope of authorisation

- 1.1 Authorisation of the activities is subject to the conditions contained in this authorisation, which conditions form part of the environmental authorisation and are binding on the holder of the authorisation.
- 1.2 The holder of the authorisation shall be responsible for ensuring compliance with the conditions by any person acting on his or her behalf, including but not limited to, an agent, sub-contractor, employee or person rendering a service to the holder of the authorisation.
- 1.3 The activities which are authorised may only be carried out at the property indicated above.
- 1.4 Any changes to, or deviations from, the project description set out in this authorisation must be approved, in writing, by the Department before such changes or deviations may be effected. In assessing whether to grant such approval or not, the Department may request such information as it deems necessary to evaluate the significance and impacts of such changes or deviations and it may be necessary for the holder of the authorisation to apply for further authorisation in terms of the regulations.
- 1.5 These activities must commence within a period of two (2) years from the date of issue. If commencement of the activity does not occur within that period, the authorisation lapses and a new application for environmental authorisation must be made in order for the activities to be undertaken.
- 1.6 This authorisation does not negate the holder of the authorisation's responsibility to comply with any other statutory requirements that may be applicable to the undertaking of the activity.

Appeal of authorisation

- 1.7 The holder of the authorisation must notify every registered interested and affected party, in writing and within ten (10) calendar days, of receiving notice of the Department's decision to authorise the activity.
- 1.8 The notification referred to in 1.7 must –
 - 1.8.1 Specify the date on which the authorisation was issued;
 - 1.8.2 Inform the interested and affected party of the appeal procedure provided for in Chapter 7 of the regulations; and

an independent consultant, and the report must include but not be limited to the following –

- 1.13.1 Monthly fuel and additives volume accepted and consumed, including a discussion on any discrepancies;
- 1.13.2 Confirmation that:
 - a. maintenance of pumps, separator and associated equipments have been undertaken according to a maintenance register;
 - b. there is conformance of operation to industry standards and SANS codes; and
 - c. records of waste and effluent disposed/removed from the site are being kept by the holder of authorization.
- 1.13.3 Compliance with:
 - a. the conditions of this authorisation;
 - b. the conditions of the Atmospheric Emission Licence (AEL) issued by Sedibeng District Municipality;
 - c. the requirements of the Occupational Health and Safety Act, 1993 (Act No. 85 of 1993); and
 - d. the EMPr and Emergency Response Plan.
- 1.13.4 Update of emergency procedures and fire drills;
- 1.13.5 Update of disaster management plan; and
- 1.13.6 Results of annual and any other pressure testing exercises.

GDARS
Office of the EOD
'14 -5-24
000031

The first audit report must also verify the following:

- 1.13.7 Conformance of the installation and pipes, the tanks manufacture with the relevant SANS standards. This must include a discussion on the pollution prevention measures implemented;
- 1.13.8 The installation conforms to industry standards;
- 1.13.9 The oil/water separator is working correctly and is appropriately maintained;
- 1.13.10 The certificate was indeed issued by the tanks manufacturer/supplier; and
- 1.13.11 The personnel have been trained in spills response skills by a representative of Vopak South Africa Developments (Proprietary) Limited.

- 1.27 The tanks must be installed within a sealed bund wall with a capacity of 110% in order to contain any spillages which may occur.
- 1.28 No burning must be allowed close to the tanks to avoid any unnecessary ignition.
- 1.29 Dust generated by construction activities must be minimized by dust suppression techniques as stipulated in the EMP.
- 1.30 The Emergency Response Plan for the proposed facility must be approved by Lesedi Local Municipality.
- 1.31 Effective measures must be taken to minimize the flow of surface water to the excavation during construction.
- 1.32 Prevention of erosion or leaching of water from stockpiles must be maintained during construction.
- 1.33 Topsoil must be stored in piles of not more than two (2) meters in height.
- 1.34 Construction stockpiles must be stored away from the drainage areas.
- 1.35 No unauthorised access must be allowed on site during the construction process, appropriate notification signs must be erected, warning the residents and visitors about the hazards around the construction site and presence of heavy vehicles.
- 1.36 Acceptable rehabilitation processes (where appropriate) must be undertaken during construction and after the commissioning of the proposed activities.
- 1.37 An environmental control officer (ECO) must be appointed to ensure that regular audits are performed before, during and after construction of the tanks facility to ensure implementation of mitigation and management measures. Furthermore, an ECO must monitor the applicant's compliance with all the conditions of this authorisation.

GDARD**Office of the EOP****Operation of the activity**

14-03-24 000031

- 1.38 Atmospheric emissions must be managed in accordance with Atmospheric Emission License (AEL) issued by Sedibeng District Municipality as the licensing authority.
- 1.39 The holder of the authorization must ensure that the pipeline route is inspected fortnightly for the first six (6) months of operation and once per month during subsequent months for signs of soil erosion or stormwater damage. Any sign of damage must be rectified immediately to prevent exposure of the pipeline.
- 1.40 All effluents must meet the relevant local authority and DWA requirements before discharge into a municipal sewer system for disposal. Records to ensure compliance in this respect must be maintained.
- 1.41 All waste streams must be managed in accordance with the hierarchy of waste management principles and disposal at a licensed landfill site must be the last option.

General

- 1.52 A copy of this authorisation must be kept at the property where the activities will be undertaken. The authorisation must be produced to any authorised official of the Department who requests to see it and must be made available for inspection by any employee or agent of the holder of the authorisation who works or undertakes work at the property.
- 1.53 Where any of the applicant's contact details change, including the name of the responsible person, the physical or postal address and/or telephonic details, the applicant must notify the Department as soon as the new details become known to the applicant.
- 1.54 The holder of the authorisation must notify the Department, in writing and within twenty four (24) hours, if condition 1.9 to 1.56 of this authorisation cannot be or is not adhered to. In all other cases, the holder of the authorisation must notify the Department, in writing, within seven (7) days if a condition of this authorisation is not adhered to. Any notification in terms of this condition must be accompanied by reasons for the non-compliance.
- 1.55 Non-compliance with a condition of this authorisation may result in criminal prosecution or other actions provided for in the National Environmental Management Act, 1998 and the regulations.

Date of environmental authorisation: 23/06/14



Ms. T.R. Mbassa-Sigabi

Head: Department of Agriculture and Rural Development

GDARE
Office of the Head
14-05-24 000031

- Environmental Impact Assessment Report received by the Department on 18 December 2013.
- b) Relevant information contained in the Departmental information base including -
 - Geographical Information System (GIS); and
 - Relevant information gathered through the public participation process undertaken as set out in regulations 54 of the NEMA Regulations 2010.
- c) The objectives and requirements of relevant legislations, policies and guidelines, including Section 2 of the National Environmental Management Act, 1998 (Act No. 107 of 1998).

3. Key factors considered in making the decision

All information presented to the Department was taken into account in the Department's consideration of the application. A summary of the issues which, in the Department's view, were of the most significance are set out below.

- a) The possible impacts that could result from the activities and mitigation measures as discussed in the Environmental Management Programme (EMPr).
- b) Need and desirability of the proposed activities.
- c) Comments from interested and affected parties.
- d) Site inspection conducted on 04 March 2014.
- e) Comments/recommendations from Biodiversity Branch of the Department.

GDARD
Office of the Head
14-03-24
000037

4. Findings

After consideration of the information and factors listed above, the Department made the following findings -

- a) The development is for the proposed VSAD Reatile Bulk Petroleum Products Storage and Distribution Facility in Heidelberg, Lesedi Local Municipality;
- b) The proposed development will consist of phase one with a total storage capacity of 140 000 m³ and phase two with a total storage capacity of 200 000 m³;
- c) The products to be stored at the VSAD Reatile Bulk Petroleum Products Storage and Distribution site are:
 - Unleaded petrol 93 octane (ULP93);
 - Unleaded petrol 95 octane (ULP95);

detrimental environmental impacts resulting from the proposed activity can be mitigated to acceptable levels. The application is accordingly granted.

GDAED
Office of the HQ
14 -23-24
000031



GAUTENG PROVINCE

AGRICULTURE AND RURAL DEVELOPMENT
REPUBLIC OF SOUTH AFRICA

OFFICE OF THE HEAD OF DEPARTMENT (HOD)

Diamond Building, 11 Diagonal Street, Newtown
PO Box 8769, Johannesburg, 2000

Tel: 011 240 2500

Fax: 011 2 40 2700

Reference: Gaut 006/15-16/E0166

Enquiries: Teboho Leku

Telephone: 011 240 3421

Email: Teboho.Leku@gauteng.gov.za

BY FACSIMILE: 031 466 8932

BY REGISTERED MAIL

Vopak South Africa Development (Proprietary) Limited

P.O. Box 21030

105 Taiwan Road

Island View Bluff

DURBAN

4052

Telephone No.: 031 466 9220

Dear Johannes Dilweg

GDARD
Office of the HOD
13 JUN 2016
000018

AMENDMENT GRANTED: THE PROPOSED VOPAK REATILE BULK PETROLEUM STORAGE AND DISTRIBUTION FACILITY IN HEIDELBURG, LESEDI LOCAL MUNICIPALITY (GAUT 002/12-13/E0102)

The above matter and more specifically your application for an amendment received on 17 March 2016 has reference.

Please be advised that the Department has, under the powers vested in it as prescribed in Chapter 5, Regulation 29 of the Environmental Impact Assessment Regulations, 2014, ("the Regulations") decided to amend the Environmental Authorisation GAUT 002/12-13/E0102 issued on 23 June 2014 in respect of the above-mentioned activity.

In terms of Regulation 4 (2) of the Environmental Impact Assessment Regulations, 2014, you must notify all registered interested and affected parties in writing and within **fourteen (14) days** of the date of the Departments decision to amend the Environmental Authorisation (EA) as well as the provisions regarding the making of appeals that are provided in the Regulations.

Your attention is drawn to Chapter 2 of the National Appeal Regulations, 2014 which regulates the appeal process. Should you wish to appeal any aspect of the decision, you must within **twenty (20) days** of the date of notification of the decision submit your appeal including supporting documents to the appeal administrator by any of the following means:

Postal Address:

The Appeals Administrator
Department of Agriculture and Rural Development
P. O. Box 8769
JOHANNESBURG
2000

Physical Address:

The Appeals Administrator
Department of Agriculture and Rural Development
11 Diagonal Street
Diamond Building, 04th Floor
Newtown
JOHANNESBURG
2001

Fax No: 011 240 3158/2700

Email Address: appeals@gauteng.gov.za

Your appeal must be submitted in the prescribed appeal form obtainable from the appeal administrator, Ms Tsholofelo Mere at telephone number 011 240 3204 or email address Tsholofelo.mere@gauteng.gov.za. The appeal form is also available from our website: www.gdard.gpg.gov.za. Should you have queries or require additional information regarding the appeal process, you can contact the appeal administrator on any of the mentioned contact details.

Yours faithfully



MS THANDEKA MBASSA
HEAD OF DEPARTMENT
DATE: 10/06/16

GDARD
Office of the HOD
13 JUN 2016
000018



GAUTENG PROVINCE

AGRICULTURE AND RURAL DEVELOPMENT
REPUBLIC OF SOUTH AFRICA

Addendum to Environmental Authorisation

Authorisation Register Number:	GAUT 002/12-13/E0102
Last Amended:	N/A
Amendment Application Number	GAUT 006/15-16/E0166
Holder of Authorisation:	Vopak South Africa Developments (Proprietary) Limited

GDARD
Office of the HOD
13 JUN 2016
000018

Decision

The Department has decided to amend the Environmental Authorisation (EA) GAUT 002/12-13/E0102 issued to Vopak South Africa Developments (Proprietary) Limited on 23 June 2014.

Amendment

The initial EA is hereby amended as follows:

1. Condition 1.5 which reads:

"This activity must commence within a period of two (2) years from the date of issuing. If commencement of the activity does not occur within that period, the authorisation lapses and a new application for environmental authorisation must be made in order for the activity to be undertaken."

is hereby amended as follows:

*"If the activity authorised by the EA dated 23 June 2014 does not commence within a period of **eight (8) years** from the date of signature of this Addendum, the authorisation will lapse. No further extensions will be granted should this extension period lapse, a new application for environmental authorisation must be made in order for the activities to be undertaken"*

General Conditions

- 1.1 All conditions stipulated in the Environmental Authorisation dated 23 June 2014 must be strictly adhered to.
- 1.2 A copy of this Addendum together with a copy of the initial Environmental Authorisation must be kept at the property where the activity will be undertaken. The authorisations must be produced to any authorised official of the Department who requests to see them and must be made available for inspection by any employee or agent of the holder of the authorisation who works or undertakes work at the property. If it is not possible to keep a copy of this Environmental Authorisation on site, then it must be kept at the offices of the site manager.
- 1.3 Where any of the applicant's contact details change, including the name of the responsible holder of the authorisation, the physical or postal address and/ or telephonic details, the applicant must follow an amendment process as prescribed in Chapter 5 of the NEMA Environmental Impact Assessment Regulations, 2014, by submitting an amendment application to the Department for consideration and decision making as soon as the new details become known to the applicant.
- 1.4 The holder of the authorisation must notify the Department, in writing **within 7 (seven) days** if a condition of this Addendum is not adhered to. Any notification in terms of this condition must be accompanied by reasons for the non-compliance.
- 1.5 Non-compliance with a condition of this Addendum may result in criminal prosecution or other actions provided for in NEMA and the Regulations.

GDARD
Office of the HOD
13 JUN 2016
000018

Annexure 1

Reasons for Decision

1. Background

The Department issued an EA GAUT 002/12-13/E0102 on 23 June 2014 to Vopak South Africa (Proprietary) Limited for the proposed Vopak Reatile Bulk Petroleum Storage and Distribution Facility in Heidelberg for the purposed of filling station which will consist of phase one with a total storage capacity of 140 000 m³ and phase two with a total storage capacity of 200 000 m³, listed as Activity 3; 5; 6 (ii) in terms of Government Notice R. 545 and activity 14 (a)(i) in terms of Government Notice R. 546 of Environmental Impact Assessment Regulations 2010, promulgated in terms of section 24 (5) and 44 of the National Environmental Management Act, 1998 (Act No. 107 of 1998) (as amended), located on T01R00000000019000007, Heidelberg, which falls within the jurisdiction of the Lesedi Local Municipality.

The applicant chose to undertake the amendment application process without appoint an Environmental Assessment Practitioner (EAP).

2. Information considered in making the decision

In reaching its decision, the Department took, *inter alia*, the following into consideration -

- a) The information contained in the amendment application form received by the Department on 17 March 2016.
- b) The Initial Environmental Authorisation issued on 23 June 2014.
- c) The objectives and requirements of relevant legislation, policies and guidelines, including the principles contained in Section 2 of the National Environmental Management Act, 1998 (Act No.107 of 1998) (as amended).

3. Key factors considered in making the decision

All information presented to the Department was taken into account in the Department's consideration of the application. A summary of the issues which, in the Department's view, were of the most significance is set out below.

- a) The amendment does not deviate substantially from the initial Environmental Authorisation;
- b) Scope of the application and rights of interested and affected parties; and
- c) Validity of the initial Environmental Authorisation.

4. Findings

Having considered the information and factors listed above, the Department made the following findings:

- a) All other conditions set out in the initial Environmental Authorisation dated 23 June 2014 still stand and must be adhered to.
- b) The extension of validity period is an administrative matter without any change in scope of the activity and has no significant impact on the rights of Interested and Affected Parties (I&APs) and the environment.
- c) The extension of validity period of the original Environmental Authorisation will not change the nature of the activity and the level of impact will not be affected.

GDARD
Office of the HOD

13 JUN 2016

0000018

In view of the above, the Department is of the opinion that the amendment would not result in a negative environmental impact that would conflict with the general objectives and principles of integrated environmental management laid down in Chapter 5 of the NEMA and that the detrimental environmental impacts resulting from the proposed amendment can be mitigated to acceptable levels. The Environmental Authorisation is **accordingly amended**.

GDARD
Office of the HOD
13 JUN 2016
000018

1) For civil and structural design of the facility

STANDARD	DESCRIPTION
BS 4-1: 1993	Structural steel sections. Specification for hot rolled sections
BS 449-2: 1969	Specification for the use of structural steel in buildings
BS 729-3: 1995	Quality requirements for welding, fusion welding of metallic materials. Standards quality requirements.
BS 4868: 1972	Specifications for profiled aluminium sheet for building
BS 5493: 1997	Code of practice for protective coating of iron and steel structured against corrosion
BS 5531: 1998	Code of practice for safety in erecting structural frames
BS 5950-1: 2000	Structural use of steelwork in building. Code of practice for design, rolled and welded sections
BS 5950-2: 2001	Structural use of steelwork in buildings. Specification for materials, fabrication and erection. Rolled and welded section
BS 5950-7: 1992	Structural use of steelwork in buildings. Specifications for materials and workmanship. Cold formed sections
BS 6031: 1981	Code of practice for earthworks
BS 8000- 1: 1989	Workmanship on building sites. Code of practice for excavation and filling
BS 8000- 2.2:1990	Workmanship on building sites. Codes of practice for concrete work. Site work with in situ and pre-cast concrete
BS 8000- 14: 1989	Workmanship on building sites – part 14: Code and practice for below ground drainage
BS-8110-1:1997	Structural use of concrete. Code of practice for design and construction
NFPA30	Flammable and combustible liquids code

2) For the mechanical design of the facility

TYPE OF EQUIPMENT	STANDARD	DESCRIPTION
Tanks	API 620	Design and construction of large, welded, low-pressure storage tanks
	API 650	Welded steel tanks for oil storage
	BS 2654	Specification for manufacture of vertical steel welded non-refrigerated storage tanks with butt-welded shells for the petroleum industry
	SANS 10131	Above-ground storage tanks for petroleum products
Centrifugal pumps	API 610	Centrifugal pumps for general refinery service
Positive displacement pumps	API 674	Positive displacement pumps-reciprocating
Dosing Pumps	API 675	Positive displacement pumps-controlled volume
Sealing system pump	API 682	Shaft sealing systems for centrifugal and rotary pumps
Fire water pumps	NEPA 20	Standard for installation of stationary pumps for fire protection
Pressure vessels	ASME VIII div 1	ASME boiler and pressure vessel code, section VIII, division 1: rules for construction of pressure vessels
Pressure and temperature valves	API 520	Sizing, selection and installation of pressure-relieving devices in refineries
	API 521	Guide for pressure-relieving and depressuring systems
	API 526	Flanged steel safety-relief valves
	API 527	Seat tightness of pressure relief valves
Breather valves	API 520	Sizing, selection and installation of pressure-relieving devices in refineries
	API 2000	Venting atmospheric and low-pressure storage tanks: Non-refrigerated and refrigerated
Foam protection	NFPA 11	Standard for low, medium and high expansion foam
Deluge system	NFPA 15	Standard for water spray fixed systems for fire protection
Fire water tank	NFPA 22	Standard for water tanks for private protection
Fire protection	NFPA 30	Flammable and combustible liquids code
Welding	ASME IX	ASME boiler and pressure vessel code, Section IX: Welding and brazing qualifications
	AWS A5.1 / A5.5 / D1.2	American welding society standards
	EN 287	Fusion welding of steel materials

	EN 288	Specification and approval of welding procedures for metallic materials
Non-destructive examination	ASME V	ASME boiler and pressure vessel code, Section V: Non-destructive examination
Nozzle loads	WRC 107 / W297	Local stresses in spherical and cylindrical shells due to external loadings
Lubrication	API 614	Lubrication, shaft-sealing and oil-control systems and auxiliaries
Materials specifications	ASME II	ASME boiler & pressure vessel code-Section
	ISO 630	Structural steels-plates, wide flats, bars, sections and profiles
	EN 10204	Metallic materials. Types of inspection documents
Material certification	EN 10204	Metallic materials. Types of inspection documents
Gaskets	ASME B 16.20	Metallic gaskets for pipe flanges. Ring joint, spiral-wound and jacketed
Reciprocating compressors	API 618	Reciprocating compressors for petroleum, chemical and gas industry services
	ASME B16.34	Valves-flanged, threaded, and welding end
	API 598	Check valves: Wafer, wafer-lug , and double flanged type
	MSS-SP-55	Quality standard for steel castings for valves, flanges and fittings and other piping components- Visual method for evaluation of surface irregularities
	ISO R468	
Large diameter flanges	API 605	Large diameter steel flanges: NPS 26 through
	ASME B16.47	NPS 60
	ASME B16.1	Cast iron pipe flanges and flanged fittings
	ASME B16.5	Pipe flanges and flanged fittings: NPS ½ through NPS 24 metric/inch standard
	ASME B31.3	Process piping

3) For piping design

STANDARD	DESCRIPTION
ASME B16.5	Pipe flanges and flanged fittings: NPS ½ through NPS 24 metric/inch standard
ASME B16.21	Non-metallic flat gaskets for pipe flanges
ASME B1647 Series B	Large diameter steel flanges: NPS 26 through NPS 60
ASME B31.3	Process piping
DIN 8078	Polypropylene (PP) Pipes- PP-H (Type 1), PPP-B (Type 2), PP-R (Type 3) – General quality requirements and testing

4) For control systems and instrumentation design

STANDARD	DESCRIPTION
ANSI/ISA 7.0.0.1	Quality standards for instrument air
API 598	Valve inspection and testing
API 607	Fire test for soft-seated quarter-turn valves
API Manual for petroleum measurement standards	Chapter 4, "Proving systems"
ASME B16.5	Pipe flanges and flanged fittings: NPS ½ through NPS 24 metric/inch standard
ATEX	Hazardous area classification
DIN 43760	Measurement and control: Electrical temperature sensors
IEC 60534	Industrial-process control valves
IEC 60534	Part 2: Flow capacity
IEC 60534	Part 8: Noise considerations
IEC 61000	Electromagnetic compatibility for industrial-process measurement and control equipment
IEC 61000	Part 1: General introduction
IEC 61000	Part 2: Electrostatic discharge requirements
IEC 61000	Part 3: Radiated electromagnetic field requirements
IEC 61000	Part 4: Electrical fast transient/burst requirements
ISA MC 96.1	Temperature measurement thermocouples
ISA S 75.01	Flow equations for sizing control valves
ISA S 75.17	Control valve aerodynamic noise calculations
ISO R468	Surface roughness
ISO 5167	Measurement of fluid flow by means of orifice plates, nozzles and venture tubes inserted in circular cross-section conduits full

5) For electrical design

STANDARD	DESCRIPTION
BS 142	Electrical protection relays
BS 1433	Copper for electrical purposes-rod and bar
BS 1706	Electroplated coatings of zinc & cadmium on iron and steel
BS 1872	Electroplated coatings of tin
BS 2562	Specification for cable boxes for transformers and reactors
BS 3382 – Parts 1 & 2	Specification for electroplated coatings and threaded components. Parts 1 & 2: Cadmium on steel components. Zinc on steel components
BS 3382 – Parts 5 & 6	Specification for electroplated coatings and threaded components. Parts 5 & 6: Tin on copper alloy (including brass) components
BS 3523	Granular desiccant silica gel impregnated with cobalt chloride
ABS 3571	General recommendations for manual inert gas metal arc welding Part1: MIG welding of aluminium alloys
BS 4360	Specifications for weldable structural steels
BS 4504	Circular flanges for pipes, valves and fittings (PN designated)
BS 5135	Arc welding of carbon and carbon manganese steel
IEC 157	Low voltage switchgear and control gear
IEC 158	Contractors
IEC 185	Current transformers
IEC 337	Low voltage control switches
IEC 408	Low voltages air-break switches, air-break disconnectors
IEC 60034	Rotating electrical machines
IEC 60044	Current transformers
IEC 60044	Instrument transformers. Part 3 – combined transformers
IEC 60052	Recommendations for voltage measurement by means of sphere-gaps (one sphere earthed)
IEC 60076-1	Power transformers. Part 1- General
IEC 60076-2	Power transformers. Part 2- Temperature rise
IEC 60076-3	Power transformers. Part 3- Insulation levels and dielectric test
IEC 60076-5	Power transformers. Part 5- Ability to withstand short circuit
IEC 60085	Thermal evaluation and classification of electrical insulation
IEC 60144	Degrees of protection of enclosures for low-voltage switchgear and control gear
IEC 60156	Insulating liquids-determination of the breakdown voltage at power frequency
IEC 60255-21-3	Electrical relays. Part 21 – Vibration, shock bump and seismic tests on measuring relays and protection equipment. Section 3 – Seismic tests
IEC 60270	Partial discharge measurements
IEC 60296	Specification for unused mineral insulating oils for transformers and switchgear
IEC 60354	Loading guide for oil-immersed power transformers
IEC 60439	Low-voltage switchgears and control gear
IEC 60551	Determination of transformers and reactor sound levels
IEC 60947	Low-voltage switchgears and control gear
NEMA TR1	Transformers, regulators and reactors
SANS 156	Moulded case circuit breakers
SANS 60079-10	Electrical apparatus for explosive gas atmospheres – Part 10: Classification of hazardous areas

SANS 60079-11/IEC60079-11	Electrical apparatus for explosive gas atmospheres – Part 11: Classification of hazardous areas
SANS 60439	Low- voltage switchgear and control assemblies
SANS 60947	Low-voltage switchgear and control gear

The Licensee must also comply with all other relevant legislation including but not limited to the following:

1. Occupational Health and Safety Act, 1993 (Act No. 85 of 1993);
2. The National Environmental Management Act, 1998 (Act No. 107 of 1998);
3. The Environment Conservation Act, 1989 (Act No. 73 of 1989)
4. The National Water Act, 1998 (Act No. 36 of 1998);
5. The Water Services Act, 1997 (Act No. 108 of 1997);
6. National Environmental Management: Air Quality Management Act, 2004 (Act No. 39 of 2004);
7. The Hazardous Substances Act, 1973 (Act No. 15 of 1973);
8. The Health Act, 1977 (Act No. 63 of 1977);
9. The National Health Act, 2003 (Act No. 61 of 2003); and
10. The National Building Regulations and Building Standards Act, 1977 (Act No. 103 of 1977)

SAFETY DATA SHEET

Revision Date : 12.11.2014

1. PRODUCT AND COMPANY IDENTIFICATION

Product name : Engen Dynamic Diesel 0.05
Chemical name : Diesel fuel
Synonyms : Hydrocarbon Liquid
Product use : Automotive diesel fuel
UN number : 1202

Supplier : Engen Petroleum Limited (Tel: +27 (0) 21 403 4911, a/h: +27 (0) 21 403 4099)
Health Emergency Telephone : +27 (0) 21 689 5227 (Red Cross Poison Service)
Transport Emergency Telephone : +27 (0) 11 975 1278/83 (Hazchemwise)
Customer Service Centre : 0860 036 436 (Sales and Technical Information)
Engen Website : <http://www.engen.co.za/>

2. HAZARDS IDENTIFICATION

Emergency response data : Light Amber Liquid. Flammable. Product can accumulate a static charge and release vapours which may cause a fire or explosion. DOT ERG No. : 128

GHS Classification:**Health**

Acute inhalation toxicity	Hazard category 3. Toxic if inhaled.	Danger
Acute oral toxicity	Hazard category 5. May be harmful if swallowed.	Warning
Skin irritation	Hazard category 2. Causes skin irritation.	Warning
Eye irritation	Hazard category 2B. Irritant.	Warning
Carcinogenicity	Hazard category 2. Under conditions of poor hygiene and long term exposure, this product should be considered a human carcinogen.	Warning

Environmental

Aquatic toxicity	: Hazard category 2. May cause long-term adverse effects in the aquatic environment.	Warning
------------------	--	---------

Physical

Flammability	: Hazard category 3. Flammable liquid and vapour.	Warning
--------------	---	---------

GHS Labels/Pictograms:**Hazard Statements**

Flammable liquid and vapour. Fumes from heated product may cause eye and lung irritation. Toxic if swallowed. Harmful in contact with skin.

Note: This product may contain polycyclic aromatic hydrocarbons, some of which have been reported to cause skin cancer in humans under conditions of poor personal hygiene, prolonged repeated contact, and exposure to sunlight.

Engen Dynamic Diesel 0.05

Precautionary Statements

Prevention

Do not breathe vapours. Wash exposed skin after handling this product. Do not eat, drink or smoke when using this product.

Response

IN CASE OF FIRE: Use carbon dioxide, foam or dry chemical for extinction. IF INHALED: Call a POISON CENTRE or doctor if you feel unwell. IF SWALLOWED: Get medical attention if you feel unwell. IF ON SKIN: If irritation occurs, get medical attention. IF IN EYES: Rinse cautiously with water for several minutes.

Disposal

Do not discharge into lakes, streams, ponds and ground water supply.

See Section 11 for further health effects/toxicological data.

3. COMPOSITION/INFORMATION ON INGREDIENTS

Chemical name	CAS-No.	Weight%
Diesel fuel	68334-30-5	> 98.00
Ethyl Benzene	100-41-4	< 1.00
Naphthalene	91-20-3	< 1.00

See Section 8 for Exposure Limits (if applicable).

4. FIRST AID MEASURES

Inhalation	:	Remove from further exposure. If respiratory irritation, dizziness, nausea, or unconsciousness occurs, seek immediate medical assistance. If breathing has stopped, assist ventilation with mechanical device or use mouth-to-mouth resuscitation with a mouthpiece.
Skin contact	:	Remove contaminated clothing. Dry wipe exposed skin and cleanse with hand cleaner, soap and water. Launder contaminated clothing before reuse. (See Section 16 - Injection Injury)
Eye contact	:	Flush thoroughly with water for at least 15 minutes. Get medical assistance.
Ingestion	:	Seek immediate medical attention. Do not induce vomiting.
Note to doctors	:	Material if aspirated into the lungs may cause chemical pneumonitis. Skin contact may aggravate an existing dermatitis. Treat appropriately.

5. FIRE-FIGHTING MEASURES

Extinguishing media	:	Carbon dioxide, foam, dry chemical and water fog.
Special fire fighting procedure	:	Water spray should only be used to keep fire-exposed containers cool, flush spills away from exposures, disperse vapours and protect personnel attempting to stop leak. Prevent runoff from fire control or dilution from entering streams, municipal sewers, or drinking water supply.
Special protective equipment for firefighters	:	For fires in enclosed areas, fire fighters must use Self-Contained Breathing Apparatus.
Products of decomposition	:	Fumes, smoke, carbon monoxide, sulphur oxides, aldehydes and other

Engen Dynamic Diesel 0.05

decomposition products, in the case of incomplete combustion.

Flash Point : > 55 °C (ASTM D-93)
Upper Explosion Limit (UEL) : 7 %(V)
Lower Explosion Limit (LEL) : 0.6 %(V)
NFPA Hazard Id : Health: 1; Flammability: 2; Reactivity: 0

6. ACCIDENTAL RELEASE MEASURES

Procedure if material is released or spilled : Report spills/releases as required to appropriate authorities.

Methods for cleaning up : Eliminate sources of ignition. Warn occupants and/or ships in the downwind areas of fire and explosion hazard, and warn them to stay clear.
LAND SPILL: Shut off source taking normal safety precautions. Take measures to minimize the effects on ground water. Recover by pumping using explosion-proof equipment or contain spilled liquid with sand or other suitable absorbent and remove mechanically into containers. If necessary, dispose of absorbed residues as directed in Section 13.
WATER SPILL: Notify port and relevant authorities. Confine with booms if skimming equipment is available to recover the spill for later recycling or disposal.
If permitted by local authorities and environmental agencies disperse in unconfined waters. If allowed by regulatory authorities the use of suitable dispersants should be considered where recommended in local oil spill procedures.

Personal precautions : See Section 8.

Environmental precautions : Prevent spill from entering municipal sewers, water sources or low lying areas. Advise the relevant authorities if contaminations have occurred.

7. HANDLING AND STORAGE

Safe handling advice : Keep product away from high energy ignition sources, heat, sparks, pilot lights, static electricity, and open flames. Harmful in contact with or if absorbed through the skin. Avoid inhalation of vapours or mists. Use in well ventilated area away from all ignition sources. See Section 8 for additional personal protection advice when handling this product.

Storage information : Store away from all ignition sources in a cool, well ventilated area. This product is a static accumulator, therefore, all storage containers should be grounded and bonded. Drums should also be equipped with self-closing valves, pressure vacuum bungs and flame arresters.

Storage and handling procedures : Electrical equipment and fittings must comply with local fire prevention regulations for this class of product. Refer to national or local regulations covering safety at petroleum handling and storage areas for this product.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Occupational Exposure Limits (OELs)

Components	CAS-No.	Source	TWA	Value		Notations
Naphthalene	91-20-3	ACGIH TLV	LTEL	52 mg/m3	10 ppm	Skin; A4
			STEL	79 mg/m3	15 ppm	
		OSHA PEL	LTEL	50 mg/m3	10 ppm	
			STEL	75 mg/m3	15 ppm	

Engen Dynamic Diesel 0.05

Diesel fuel	68334-30-5	ACGIH TLV	LTEL	100 mg/m ³	15 ppm	Skin; A3
Ethyl Benzene	100-41-4	ACGIH TLV OSHA PEL	LTEL STEL LTEL STEL	434 mg/m ³ 543 mg/m ³ 435 mg/m ³ 545 mg/m ³	100 ppm 125 ppm 100 ppm 125 ppm	A3; BEI

LTEL: Long Term Exposure Limits - Time Weight Average (TWA) over 8 hours.

STEL: Short Term Exposure Limits - Time Weight Average (TWA) over 15 Minutes

Note: Limits Shown for guidance only. Follow applicable regulations.

Personal Protective Equipment (PPE)

- Engineering controls : Use in well ventilated area. Explosive-proof ventilation equipment with local exhaust is desirable.
- Respiratory protection : Approved respiratory equipment must be used when airborne concentrations are unknown or exceed the recommended exposure limit. Self-Contained Breathing Apparatus may be required for use in confined or enclosed spaces.
- Eye protection : If splash with liquid is possible, chemical type goggles should be worn.
- Skin and body protection : Impervious gloves must be worn. If body contact is likely, appropriate personal protective equipment must be worn. Good personal hygiene practices should always be followed.

9. PHYSICAL AND CHEMICAL PROPERTIES

- Appearance : Liquid.
- Colour : Light Amber
- Odour : Hydrocarbon
- Solubility : Negligible
- Boiling point : > 170 °C < 400 °C
- Flash Point : > 55 °C (ASTM D-93)
- Upper Explosion Limit (UEL) : 7 %(V)
- Lower Explosion Limit (LEL) : 0.6 %(V)
- Vapour pressure : 0.5 hPa
- Relative vapour density : 2
- Density : 0.8450 g/cm³ @ 20 °C
- Pour point : < -7 °C
- Viscosity, kinematic : 3.5 mm²/s @ 40 °C (ASTM D-445)
< 1 mm²/s @ 100 °C (ASTM D-445)

10. STABILITY AND REACTIVITY

- Stability : Stable.
- Conditions to avoid : Extreme heat and high energy sources of ignition, such as sparks and static electricity.
- Materials to avoid : Halogens, strong acids, alkalis and oxidizers.
- Hazardous decomposition products : Fumes, smoke, carbon monoxide, sulphur oxides, aldehydes and other decomposition products, in the case of incomplete combustion.

11. TOXICOLOGICAL INFORMATION

Engen Dynamic Diesel 0.05

Acute oral toxicity	:	(Rats): Practically non-toxic (LD50: Greater than 2000 mg/kg). Based on testing of similar products and/or components. Warning Hazard category 5. May be harmful if swallowed.
Acute dermal toxicity	:	(Rabbits): Practically non-toxic (LD50: greater than 2000 mg/kg). Based on testing of similar products and/or the components. Warning Hazard category 5. May be harmful in contact with skin.
Acute inhalation toxicity	:	(Rats): Toxic (LC50: greater than 2 but 10mg/l or less) 4 hours. Based on testing products and/or components. Danger Hazard category 3. Toxic if inhaled.
Skin irritation	:	(Rabbits): Irritant. (Primary Irritation Index: greater than 3 but less than 6). Based on testing of similar products and/or the components. Warning Hazard category 2. Causes skin irritation.
Eye irritation	:	(Rabbits): Mild irritant. (Draize score: greater than 6 but 15 or less). Based on testing of similar products and/or the components. Warning Hazard category 2B. Causes eye irritation.
Respiratory and skin sensitization	:	Middle distillate oils were not skin sensitizers when tested in a Modified Buehler Guinea Pig Sensitization Assay.
Germ cell mutagenicity	:	Evidence from short-term predicative tests (Modified Ames) does indicate some level of mutagenic activity associated with levels of polycyclic aromatic compounds in certain test samples.
Carcinogenicity	:	Diesel fuel, heating oil and middle distillates have been shown to be carcinogenic in lifetime mouse skin painting bioassays. While in some cases, the tumor incidence is low in the test populations and possibly associated with skin irritation caused by the defatting of the skin. Warning Hazard category 2. This product contains ethylbenzene. The International Agency for Research on Cancer (IARC) has evaluated ethylbenzene and classified it as possibly carcinogenic to humans (Group 2B) based on sufficient evidence for carcinogenicity in experimental animals, but inadequate evidence for cancer in exposed humans. Animal studies involving lifetime exposure to high levels of diesel exhaust have produced variable results, with some studies indicating a potential for lung cancer. Limited evidence from epidemiological studies suggest an association between long-term occupational exposure to diesel engine emissions and lung cancer.
Reproductive toxicity (Teratogenicity)	:	Diesel fuel vapours were tested in an inhalation teratology (developmental toxicity) study in rats and when only minimal maternal toxicity was observed, no fetotoxic or developmental effects were observed. A developmental toxicity study of dermally applied middle distillates did indicate fetotoxicity (reduced litter size, litter weight, increased resorptions) at doses that also caused significant maternal toxicity.
Specific target organ toxicity (STOT) - single exposure	:	Respiratory irritation, dizziness, nausea and loss of consciousness. Warning Hazard category 3. Narcotic effect.
Specific target organ toxicity (STOT) - repeated exposure	:	Repeated dermal application of middle distillates, heating oils and diesel oils to rabbits for 2-4 weeks at up to 1 gm/kg resulted in strong to severe skin irritation with some weight loss at the higher dose. Toxic effects ranging from weight loss to mortality was observed in rabbits treated repeatedly with very high doses (6 gm/kg) of these oils.
Aspiration hazard	:	Material if aspirated into the lungs may cause chemical pneumonitis. Overexposure to diesel exhaust fumes may result in eye irritation, headaches, nausea, and respiratory irritation. Diesel engine exhaust typically consists of gases and particulates, including carbon dioxide, carbon monoxide, nitrogen compounds, oxides of sulphur, and hydrocarbons. The composition will vary with fuel, engine type, load cycle, engine maintenance, tuning and exhaust gas treatment. Use of

Engen Dynamic Diesel 0.05

adequate ventilation and/or respiratory protection in the presence of diesel exhaust is recommended to minimize exposures.

12. ECOLOGICAL INFORMATION

Ecotoxicity effects

Toxicity to fish	:	(Salmon) LC/EC50: 8.1 mg/l at 96 hours.
Toxicity to aquatic organisms	:	(Daphnia magna) LC/EC50: 6 mg/l at 48 hours. (Green algae) LC/EC50: 9.4 mg/l at 8 hours.

Elimination information (persistence and degradability)

Biodegradability	:	The majority of the components in this product would be expected to be inherently biodegradable. The constituents of diesel fuels which are volatilized will photodegrade in the atmosphere. The less volatile, more water-soluble components which are aromatic hydrocarbons will also undergo aqueous photodegradation.
Mobility	:	Dissolution of the higher molecular weight hydrocarbon components in water will be limited, but losses through sediment adsorption may be significant.
Bioaccumulation	:	Not established.

Further information on ecology

Remarks	:	In the absence of specific environmental data for this product, this assessment is based on information for representative substances.
---------	---	--

13. DISPOSAL CONSIDERATIONS

Waste disposal	:	Product is suitable for burning for fuel value in compliance with applicable laws and regulations, and consideration of product characteristics at time of disposal.
Other regulations	:	Disposal of unused product may be subject to RCRA regulations (40 CFR 261). Disposal of the used product may also be regulated due to ignitability, corrosivity, reactivity, or toxicity as determined by the Toxicity Characteristic Leaching Procedure (TCLP).
Flash Point	:	> 55 °C (ASTM D-93)

14. TRANSPORT INFORMATION

Note	:	The flash point of this material is > 55 °C, and hence regulatory classifications for flammability may vary.
------	---	--

In accordance with 49 CFR 173.150(f)(2), non-bulk quantities of this material (<119 gallons per container) may be shipped as non regulated for USA domestic shipments.

ADR

Proper shipping name	:	GAS OIL
UN number	:	1202
Class	:	3
Letter	:	F
Packing group	:	III
Labelling number	:	3

CFR

Engen Dynamic Diesel 0.05

Proper shipping name	:	GAS OIL
UN number	:	1202
Class	:	3
Letter	:	F
Packing group	:	III
Labelling number	:	3

IATA_C

Proper shipping name	:	GAS OIL
UN number	:	1202
Class	:	3
Letter	:	F
Packing group	:	III
Labelling number	:	3

IMDG

Proper shipping name	:	GAS OIL
UN number	:	1202
Class	:	3
Letter	:	F
Packing group	:	III
Labelling number	:	3
Marine pollutant	:	Marine Pollutant
Medical First Aid Guide (MFAG) table	:	311
Emergency Schedule (EmS) number	:	3-07
IMDG code page number	:	3375
Static Accumulator (50 picosiemens or less)	:	Yes

15. REGULATORY INFORMATION

US OSHA Hazard Communication Standard	:	Product assessed in accordance with OSHA 29 CFR 1910.1200 and determined to be hazardous.
Governmental Inventory Status	:	All components comply with TSCA, EINECS/ELINCS, AICS, METI, DSL, KECI, ENCS, PICCS and IECSC.
EU Labelling	:	Product is dangerous as defined by the European Union Dangerous Substances/Preparations Directives.
Symbols	:	F, T, N Flammable, Toxic, Dangerous for the environment
R-Phrase(s)	:	R10, R40, R65, R66, R51/53 Flammable., Limited evidence of a carcinogenic effect., Harmful: may cause lung damage if swallowed., Repeated exposure may cause skin dryness or cracking., Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.
S-Phrase(s)	:	S24, S2, S36/37, S62 Avoid contact with the skin., Keep out of the reach of children., Wear suitable protective clothing and gloves., If swallowed, do not induce vomiting: seek medical advice immediately and show this container or label.
Note	:	Contains Gas Oil - unspecified.

SARA

U.S. Superfund	:	This product contains no "EXTREMELY HAZARDOUS SUBSTANCES".
----------------	---	--

Engen Dynamic Diesel 0.05

Amendments and
Reauthorization Act SARA
Title III

SARA (311/312) Reportable : Fire Chronic Acute
Hazard Categories

SARA (313) Toxic Release : Ethyl Benzene (100-41-4) - Conc < 1 %.
Chemicals:

The following product ingredients are cited on the lists below

Chemical name	CAS-No.	Concentration [%]	List Citations
Diesel fuel	68334-30-5	> 98.00	21, 26
Ethyl Benzene	100-41-4	< 1.00	1, 8, 10, 18, 19, 20, 21, 23, 24, 25, 26
Naphthalene	91-20-3	< 1.00	16, 22

Regulatory List Searched

1 = ACGIH ALL	6 = IARC 1	11 = TSCA 4	17 = CA P65	22 = MI 293
2 = ACGIH A1	7 = IARC 2A	12 = TSCA 5a2	18 = CA RTK	23 = MN RTK
3 = ACGIH A2	8 = IARC 2B	13 = TSCA 5e	19 = FL RTK	24 = NJ RTK
4 = NTP CARC	9 = OSHA CARC	14 = TSCA 6	20 = IL RTK	25 = PA RTK
5 = NTP SUS	10 = OSHA Z	15 = TSCA 12b	21 = LA RTK	26 = RI RTK

Code Key: CARC = Carcinogen; SUS = Suspected Carcinogen

16. OTHER INFORMATION

Note: Engen products do not contain PCBs.

INJECTION INJURY WARNING: If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should be evaluated immediately by a doctor as a surgical emergency. Even though initial symptoms from high pressure injection may be minimal or absent, early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

Note: No significant changes have been made to this Safety Data Sheet since the previous date.

Disclaimer

Information given herein is offered in good faith as accurate, but without guarantee. Conditions of use and suitability of the product for particular uses are beyond our control; all risks of use of the product are therefore assumed by the user and we expressly disclaim all warranties of every kind and nature, including warranties of merchantability and fitness for a particular purpose in respect to the use or suitability of the product. Nothing is intended as a recommendation for uses which infringe valid patents or as extending license under valid patents. Appropriate warnings and safe handling procedures should be provided to handlers and users.

Prepared by	:	Corporate Health, Safety, Environment and Quality Department Engen Petroleum Limited P.O.Box 35, Cape Town, 8000
Telephone	:	+27 (0) 21 403 4911 (Office Hours) +27 (0) 21 403 4099 (After Hours)

SAFETY DATA SHEET

Revision Date : 02.12.2009

1. PRODUCT AND COMPANY IDENTIFICATION

Product name : Engen Dieselube 500 Super
Product use : Automotive lubricant

Supplier : Engen Petroleum Limited (Tel: 021-403 4911, a/h: 021-403 4099)
Health Emergency Telephone : 021-689 5227 (Red Cross Poison Service)
Transport Emergency Telephone : 011-975 1278/83 (Hazchemwise)
Customer Service Centre : 0860 036 436 (Sales and Technical Information)
Engen Website : <http://www.engen.co.za/>

2. HAZARDS IDENTIFICATION

Emergency response data : Amber Liquid. DOT ERG No. - Not applicable.

GHS Classification:**Health**

Acute inhalation toxicity	May be harmful if inhaled. Hazard category 4.	Warning
Acute oral toxicity	May be harmful if swallowed. Hazard category 5.	Warning
Skin irritation	Practically non-irritating. Hazard category 3.	Warning
Eye irritation	Mild irritant. Hazard category 2B.	Warning

Environmental

Aquatic toxicity : Hazard category 3. Toxic to fish, aquatic organisms and wildlife. Warning

Physical

Flammability : Combustible liquid. This product is non-flammable. Warning

GHS Labels/Pictograms:**Hazard Statements**

Combustible liquid. May cause mild eye irritation. May be harmful if swallowed or inhaled.

Precautionary Statements**Response**

IN CASE OF FIRE: use Carbon dioxide, foam or dry chemical for extinction. IF IN EYES: Rinse cautiously with water for several minutes. IF SWALLOWED: Get medical attention if you feel unwell. IF INHALED: Remove to fresh air and keep at rest in a position comfortable for breath.

Disposal

Do not discharge into lakes, streams, ponds and ground water supply.

See Section 11 for further health effects/toxicological data.

3. COMPOSITION/INFORMATION ON INGREDIENTS

Engen Dieselube 500 Super

Chemical name	CAS-No.	Weight%
Base oils		> 90,00
Additives		< 10,00

See Section 8 for Exposure Limits (if applicable).

4. FIRST AID MEASURES

Inhalation	:	Not expected to be a problem. However, if respiratory irritation occurs due to excessive vapour or mist exposure, seek immediate medical assistance. If breathing has stopped, assist ventilation with mechanical device or use mouth-to-mouth resuscitation.
Skin contact	:	Remove contaminated clothing. Dry wipe exposed skin and cleanse with hand cleaner, soap and water. Launder contaminated clothing before reuse. (See Section 16 - Injection Injury)
Eye contact	:	Flush thoroughly with water. If irritation occurs call a doctor.
Ingestion	:	Not expected to be a problem. However, if discomfort occurs seek medical attention. Do not induce vomiting.

5. FIRE-FIGHTING MEASURES

Extinguishing media	:	Carbon dioxide, foam, dry chemical and water fog.
Special fire fighting procedure	:	Water or foam may cause frothing. Use water to keep fire exposed containers cool. Water spray may be used to flush spills away from exposure. Prevent runoff from fire control or dilution from entering streams, municipal sewers, or drinking water supply.
Special protective equipment for firefighters	:	For fires in enclosed areas, fire fighters must use Self-Contained Breathing Apparatus.
Unusual fire and explosive hazards	:	None.
Products of decomposition	:	Fumes, smoke, carbon monoxide, sulphur oxides, aldehydes and other decomposition products, in the case of incomplete combustion.
Flash Point	:	222 °C (ASTM D-92)
Upper Explosion Limit (UEL)	:	7,0 %(V)
Lower Explosion Limit (LEL)	:	0,9 %(V)
NFPA Hazard Id	:	Health: 0; Flammability: 1; Reactivity: 0

6. ACCIDENTAL RELEASE MEASURES

Procedure if material is released or spilled	:	Report spills/releases as required to appropriate authorities.
Methods for cleaning up	:	LAND SPILL: Shut off source taking normal safety precautions. Take measures to minimize the effects on ground water. Recover by pumping using explosion-proof equipment or contain spilled liquid with sand or other suitable absorbent and remove mechanically into containers. If necessary, dispose of absorbed residues as directed in Section 13. WATER SPILL: Notify port and relevant authorities. Confine with booms if skimming equipment is available to recover the spill for later recycling or disposal. Warn other ships in the vicinity. If allowed by regulatory authorities the

Engen Dieselube 500 Super

use of suitable dispersants should be considered where recommended in local oil spill procedures.

- Personal precautions : See Section 8.
- Environmental precautions : Prevent spill from entering municipal sewers, water sources or low lying areas. Advise the relevant authorities if contaminations have occurred.

7. HANDLING AND STORAGE

- Safe handling advice : No special precautions are necessary beyond normal good hygiene practices.
- Storage information : Keep containers closed when not in use. Do not store in open or unlabelled containers. Do not store near heat sources, sparks, flames, strong oxidizing agents and combustible materials.
- Storage and handling procedures : Prevent small spills and leakages to avoid slip hazard.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Occupational Exposure Limits (OELs)

Components	CAS-No.	Source	TWA	Value	Notations
------------	---------	--------	-----	-------	-----------

LTEL: Long Term Exposure Limits - Time Weight Average (TWA) over 8 hours.

STEL: Short Term Exposure Limits - Time Weight Average (TWA) over 15 Minutes

Note: Limits Shown for guidance only. Follow applicable regulations.

Personal Protection Equipment (PPE)

- Engineering controls : If mists are generated, use ventilation, local exhaust or enclosures to control below exposure limits.
- Respiratory protection : Approved respiratory equipment must be used when mist concentrations exceed the recommended exposure limits.
- Eye protection : If splash with liquid is possible, chemical type goggles should be worn.
- Skin and body protection : No special equipment required. However, if frequent splashing or liquid contact is likely to occur, wear oil impervious gloves and clothing. Good personal hygiene practices should always be followed.

9. PHYSICAL AND CHEMICAL PROPERTIES

- Appearance : Liquid.
- Colour : Amber
- Odour : Mild
- Solubility : Negligible
- Boiling point : > 316 °C
- Flash Point : 222 °C (ASTM D-92)
- Upper Explosion Limit (UEL) : 7,0 %(V)
- Lower Explosion Limit (LEL) : 0,9 %(V)
- Vapour pressure : < 0,1 hPa
- Density : 0,8830 g/cm³ @ (ASTM D-4052)
- Pour point : -27 °C
- Viscosity, kinematic : 116,6 mm²/s @ 40 °C (ASTM D-445)
15,50 mm²/s @ 100 °C (ASTM D-445)

Engen Dieselube 500 Super

10. STABILITY AND REACTIVITY

Stability	:	Stable.
Conditions to avoid	:	Extreme heat and high energy sources of ignition, such as sparks and static electricity.
Materials to avoid	:	Strong oxidizers.
Hazardous decomposition products	:	Fumes, smoke, carbon monoxide, sulphur oxides, aldehydes and other decomposition products, in the case of incomplete combustion.

11. TOXICOLOGICAL INFORMATION

Acute oral toxicity	:	(Rats): Practically non-toxic (LD50: Greater than 2000 mg/kg). Based on testing of similar products and/or components. Warning Hazard category 5. May be harmful if swallowed.
Acute dermal toxicity	:	(Rabbits): Practically non-toxic (LD50: greater than 2000 mg/kg). Based on testing of similar products and/or the components. Warning Hazard category 3. May be harmful in contact with skin.
Acute inhalation toxicity	:	(Rats): Harmful (LC50: greater than 10 but less than 20mg/l) 4 hours. Based on testing of similar products and/or the components. Warning Hazard category 4. May be harmful if inhaled.
Skin irritation	:	(Rabbits): Practically non-irritating. (Primary Irritation Index: greater than 0.5 but less than 3). Based on testing of similar products and/or the components. Warning Hazard category 3. Causes mild skin irritation.
Eye irritation	:	(Rabbits): Mild irritant. (Draize score: greater than 6 but 15 or less). Based on testing of similar products and/or the components. Warning Hazard category 2B. May cause mild eye irritation.
Respiratory and skin sensitization	:	Not expected to be sensitizing based on tests of this product, components, or similar products.
Germ cell mutagenicity	:	This product tested negative in a series of mutagenic tests.
Carcinogenicity	:	Chronic mouse skin painting studies of severely solvent refined mineral base oils showed no evidence of carcinogenic effects. Synthetic base oils have been tested in the Ames assay and other tests of mutagenicity with negative results. These base oils are not expected to be carcinogenic with chronic dermal exposures. Used petrol engine oils have shown evidence of skin carcinogenic activity in laboratory tests when no effort was made to wash the oil off between applications. Used oil from diesel engines did not produce this effect.
Reproductive toxicity (Teratogenicity)	:	No teratogenic effects would be expected from dermal exposure, based on laboratory developmental toxicity studies of major components in this formulation and/or materials of similar composition.
Specific target organ toxicity (STOT) - single exposure	:	Although an acute inhalation study was not performed with this product, a variety of mineral and synthetic oils, such as those in this product, have been tested. These samples had virtually no effect other than a nonspecific inflammatory response in the lung to the aerosolized mineral oil. The presence of additives in other tested formulations (in approximately the same amounts as in the present formulation) did not alter the observed effects.
Specific target organ toxicity	:	No significant adverse effects were found in studies using repeated

Engen Dieselube 500 Super

(STOT) - repeated exposure		dermal applications of similar formulations to the skin of laboratory animals for 13 weeks at doses significantly higher than those expected during normal industrial exposure. The animals were evaluated extensively for effects of exposure (haematology, serum chemistry, urinalysis, organ weights, microscopic examination of tissues etc.). Repeated and/or prolonged exposure may cause irritation to the skin, eyes or respiratory tract.
Aspiration hazard	:	Overexposure to oil mist may result in oil droplet deposition and/or granuloma formation.

12. ECOLOGICAL INFORMATION

Ecotoxicity effects

Toxicity to fish	:	(Salmon) LC/EC50: 8.1 mg/l at 96 hours.
Toxicity to aquatic organisms	:	(Daphnia magna) LC/EC50: 6 mg/l at 48 hours. (Green algae) LC/EC50: 9.4 mg/l at 8 hours.

Elimination information (persistence and degradability)

Biodegradability	:	This product is expected to be inherently biodegradable.
Mobility	:	Adsorption to sediment and soil will be the predominant behaviour.
Bioaccumulation	:	Minimal owing to low water solubility.

Further information on ecology

Remarks	:	In the absence of specific environmental data for this product, this assessment is based on information for representative substances.
---------	---	--

13. DISPOSAL CONSIDERATIONS

Waste disposal	:	Product is suitable for burning in an enclosed, controlled burner for fuel value or disposal by supervised incineration. Such burning may be limited pursuant to the Resource Conservation and Recovery Act. In addition, the product is suitable for processing by an approved recycling facility or can be disposed of at any government approved waste disposal facility. Use of these methods is subject to user compliance with applicable laws and regulations and considerations of product characteristics at time of disposal.
Contaminated packaging	:	Empty containers retain residue (liquid and/or vapour) and can be dangerous. DO NOT PRESSURIZE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION; THEY MAY EXPLODE AND CAUSE INJURY OR DEATH. Do not attempt to refill or clean container since residue is difficult to remove. Empty drums should be completely drained, properly bunged and promptly returned to a drum reconditioner. All containers should be disposed of in an environmentally safe manner and in accordance with governmental regulations.
Other regulations	:	The unused product, in our opinion, is not specifically listed by the EPA as a hazardous waste (40 CFR, Part 261D), nor is it formulated to contain materials which are listed hazardous wastes. It does not exhibit the hazardous characteristics of ignitability, corrosivity, or reactivity and is not formulated with contaminants as determined by the Toxicity Characteristic Leaching Procedure (TCLP). However, used product may be regulated.
Flash Point	:	222 °C (ASTM D-92)

Engen Dieselube 500 Super

14. TRANSPORT INFORMATION

Note : This product is not regulated by the following: U.S. DOT (CFR), ADR, IATA and IMDG.

Static Accumulator (50 picosiemens or less) : Yes

15. REGULATORY INFORMATION

US OSHA Hazard Communication Standard : When used for its intended purposes, this product is not classified as hazardous in accordance with OSHA 29 CFR 1910.1200.

Governmental Inventory Status : All components comply with TSCA, EINECS/ELINCS, AICS, METI, DSL, KECI, ENCS, PICCS and IECSC.

EU Labelling : Product is not dangerous as defined by the European Union Dangerous Substances/Preparations Directives. EU labelling not required.

SARA

U.S. Superfund Amendments and Reauthorization Act SARA Title III : This product contains no "EXTREMELY HAZARDOUS SUBSTANCES".

SARA (311/312) Reportable Hazard Categories : None

The following product ingredients are cited on the lists below

Chemical name	CAS-No.	Concentration [%]	List Citations
Base oils		> 90,00	Not listed
Additives		< 10,00	Not listed

Regulatory List Searched

1 = ACGIH ALL	6 = IARC 1	11 = TSCA 4	17 = CA P65	22 = MI 293
2 = ACGIH A1	7 = IARC 2A	12 = TSCA 5a2	18 = CA RTK	23 = MN RTK
3 = ACGIH A2	8 = IARC 2B	13 = TSCA 5e	19 = FL RTK	24 = NJ RTK
4 = NTP CARC	9 = OSHA CARC	14 = TSCA 6	20 = IL RTK	25 = PA RTK
5 = NTP SUS	10 = OSHA Z	15 = TSCA 12b	21 = LA RTK	26 = RI RTK

Code Key: CARC = Carcinogen; SUS = Suspected Carcinogen

16. OTHER INFORMATION

Note: Engen products do not contain PCBs.

INJECTION INJURY WARNING: If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should be evaluated immediately by a doctor as a surgical emergency. Even though initial symptoms from high pressure injection may be minimal or absent, early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

Note: No significant changes have been made to this Safety Data Sheet since the previous date.

Disclaimer

Engen Dieselube 500 Super

Information given herein is offered in good faith as accurate, but without guarantee. Conditions of use and suitability of the product for particular uses are beyond our control; all risks of use of the product are therefore assumed by the user and we expressly disclaim all warranties of every kind and nature, including warranties of merchantability and fitness for a particular purpose in respect to the use or suitability of the product. Nothing is intended as a recommendation for uses which infringe valid patents or as extending license under valid patents. Appropriate warnings and safe handling procedures should be provided to handlers and users.

Prepared by	:	Product Safety Specialist Corporate Health, Safety, Environment and Quality Department Engen Petroleum Limited P.O.Box 35, Cape Town, 8000
Telephone	:	(021) 403 4805 / 4911 (Office Hours) (021) 403 4099 (After Hours) 083 628 4415 (Cellular)

Broad Based Black Economic Empowerment Verification Certificate

Issued to

Vopak Terminal Durban (Pty) Ltd

Level 2 Contributor

Measured Entity

Company Name Vopak Terminal Durban (Pty) Ltd
Registration Number 1996/011237/07
VAT Number 4790160198
Address Taiwan Road
Island View
Durban
4052

B-BBEE Status

B-BBEE Status Level Level 2

Element Points Obtained	EO: 24.36 points; MC: 12.92 points; SD: 12.73 points; ESD: 40.31 points; SED: 5 points
Discounting Principle Applied	No
Empowering Supplier	Yes

**Black Owned: >=51% and 8 points for Net Value*

**Black Women Owned: >=30% and 8 points for Net Value*

Black Voting Rights	30.00%	Black Women Voting Rights	8.39%
Black Economic Interest	30.00%	Black Women Economic Interest	8.39%
51% Black Owned *	No	30% Black Women Owned *	No
Black Designated Group Supplier	No	Normal Flow Through Principle Applied	

Issue Date 14/09/2018
Expiry Date 13/09/2019
Certificate Number ELC8005RGENBB
Version Final
Applicable Scorecard Amended Codes - Generic
Applicable BBEE Codes Amended Generic Codes Gazetted on 11 October 2013

EmpowerLogic (Pty) Ltd

Reg. No. : 1995/000523/07

BBBEE Verification Agency

Per P Govender

Member - Verification Committee



SANAS Accredited



BVA018

BEE Procurement Recognition Levels

Level	Qualification	%
1	≥ 100 Points	135%
2	≥ 95 but < 100	125%
3	≥ 90 but < 95	110%
4	≥ 80 but < 90	100%
5	≥ 75 but < 80	80%
6	≥ 70 but < 75	60%
7	≥ 55 but < 70	50%
8	≥ 40 but < 55	10%
Non Compliant	<40	0%

Enquiries

Tel:

086 111 4003

Fax:

086 505 7284

verification@empowerlogic.co.za

www.empowerlogic.co.za



labour

Department:
Labour
REPUBLIC OF SOUTH AFRICA

Postal Address: Private Bag x117, PRETORIA, 0001. **Street Address:** Laboria House, 215 Francis Baard Street, PRETORIA
Tel: 0860101018

The Chief Executive Officer
VOPAK TERMINAL DURBAN (PTY) LTD
PO BOX 21030
BLUFF
DURBAN
4052

DOL Ref. No.: 791967
Date: 8 January 2019
Contact Person:
Contact Number: 0860101018

Dear Sir/Madam

**EMPLOYMENT EQUITY ACT, NO 55 OF 1998 AS AMENDED:
ACKNOWLEDGEMENT OF EMPLOYMENT EQUITY REPORT FOR THE 2018 REPORTING PERIOD
(Reported)**


This serves to inform you that your organisation is considered to have **Reported** for the **2018** reporting period in terms of Section 21 of the Employment Equity Act No. 55 of 1998, as amended.


Therefore, your organisation will appear on the Employment Equity Public Register for **2018** that will be published by the Minister of Labour in terms of Section 41 of the Employment Equity Act.

Yours in Equity

pp Director-General
Department of Labour

ANNEXURE 11

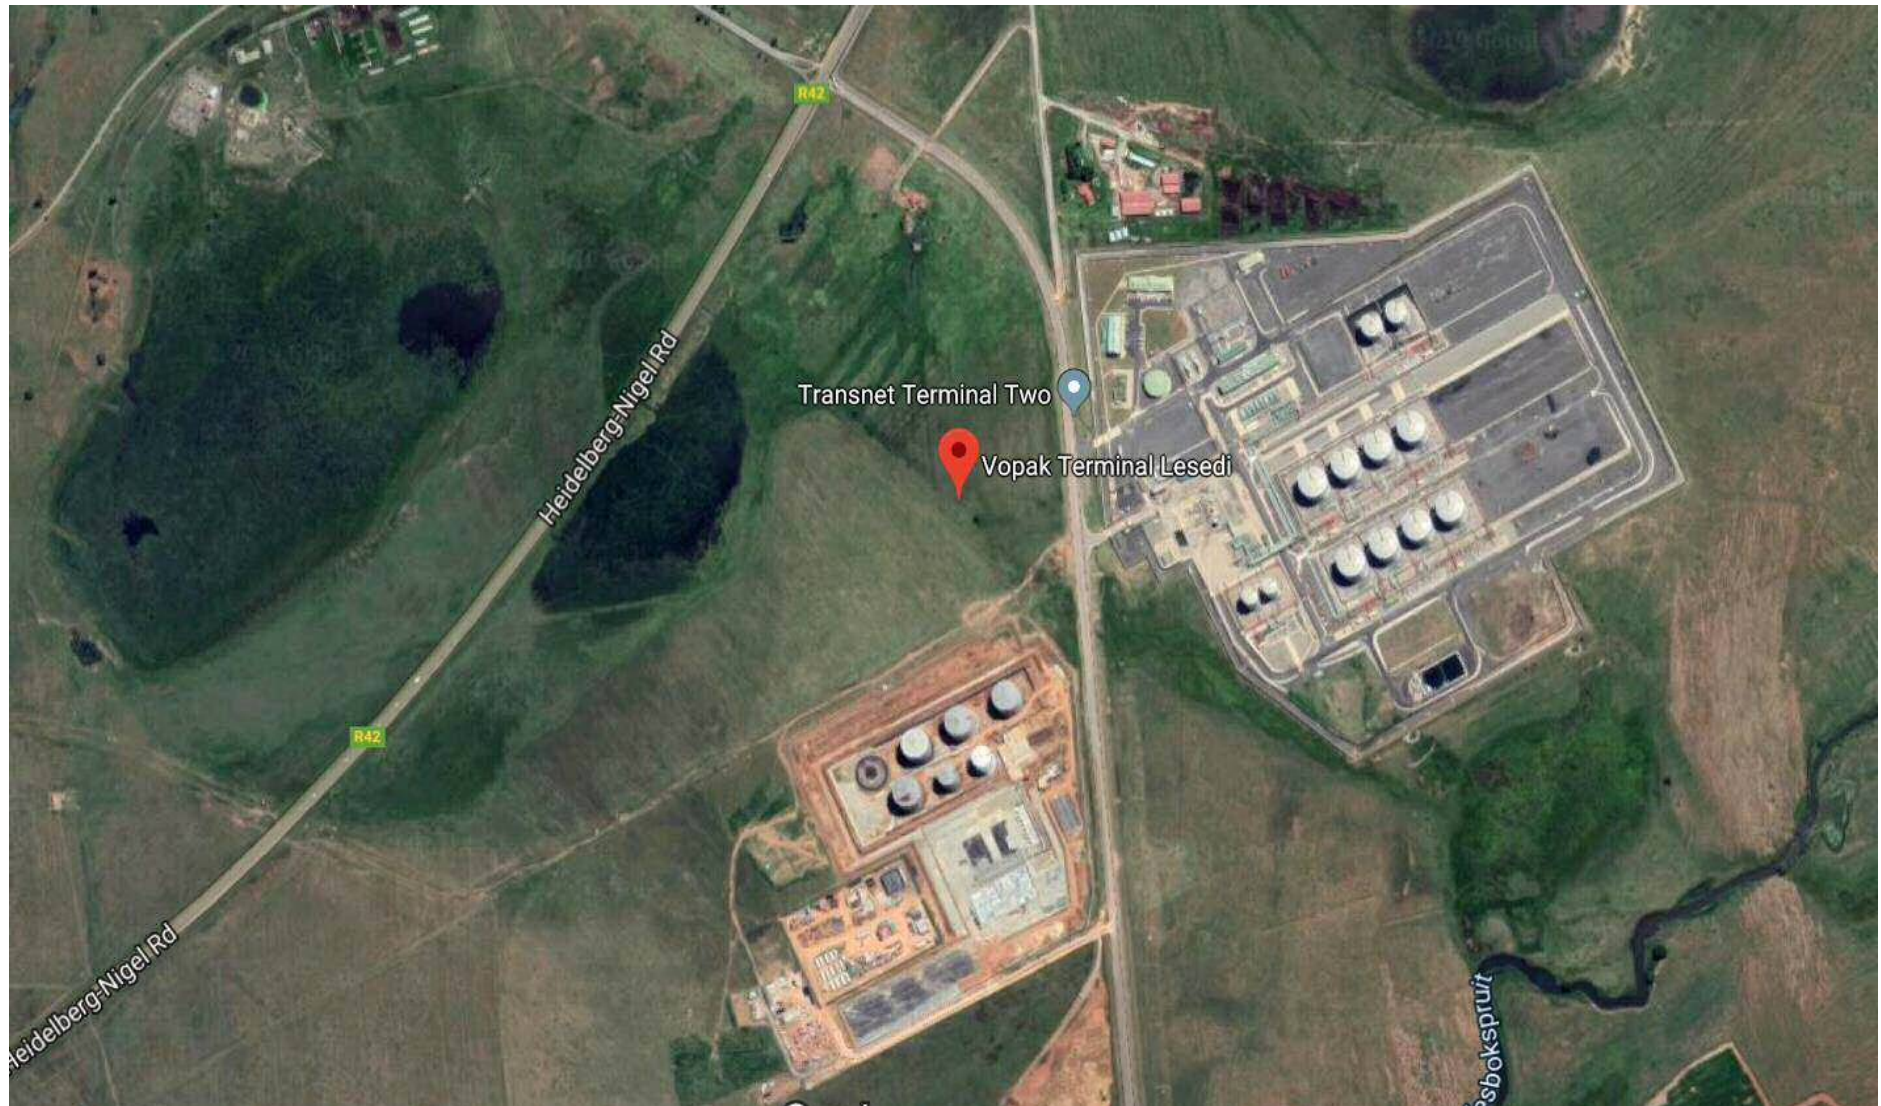

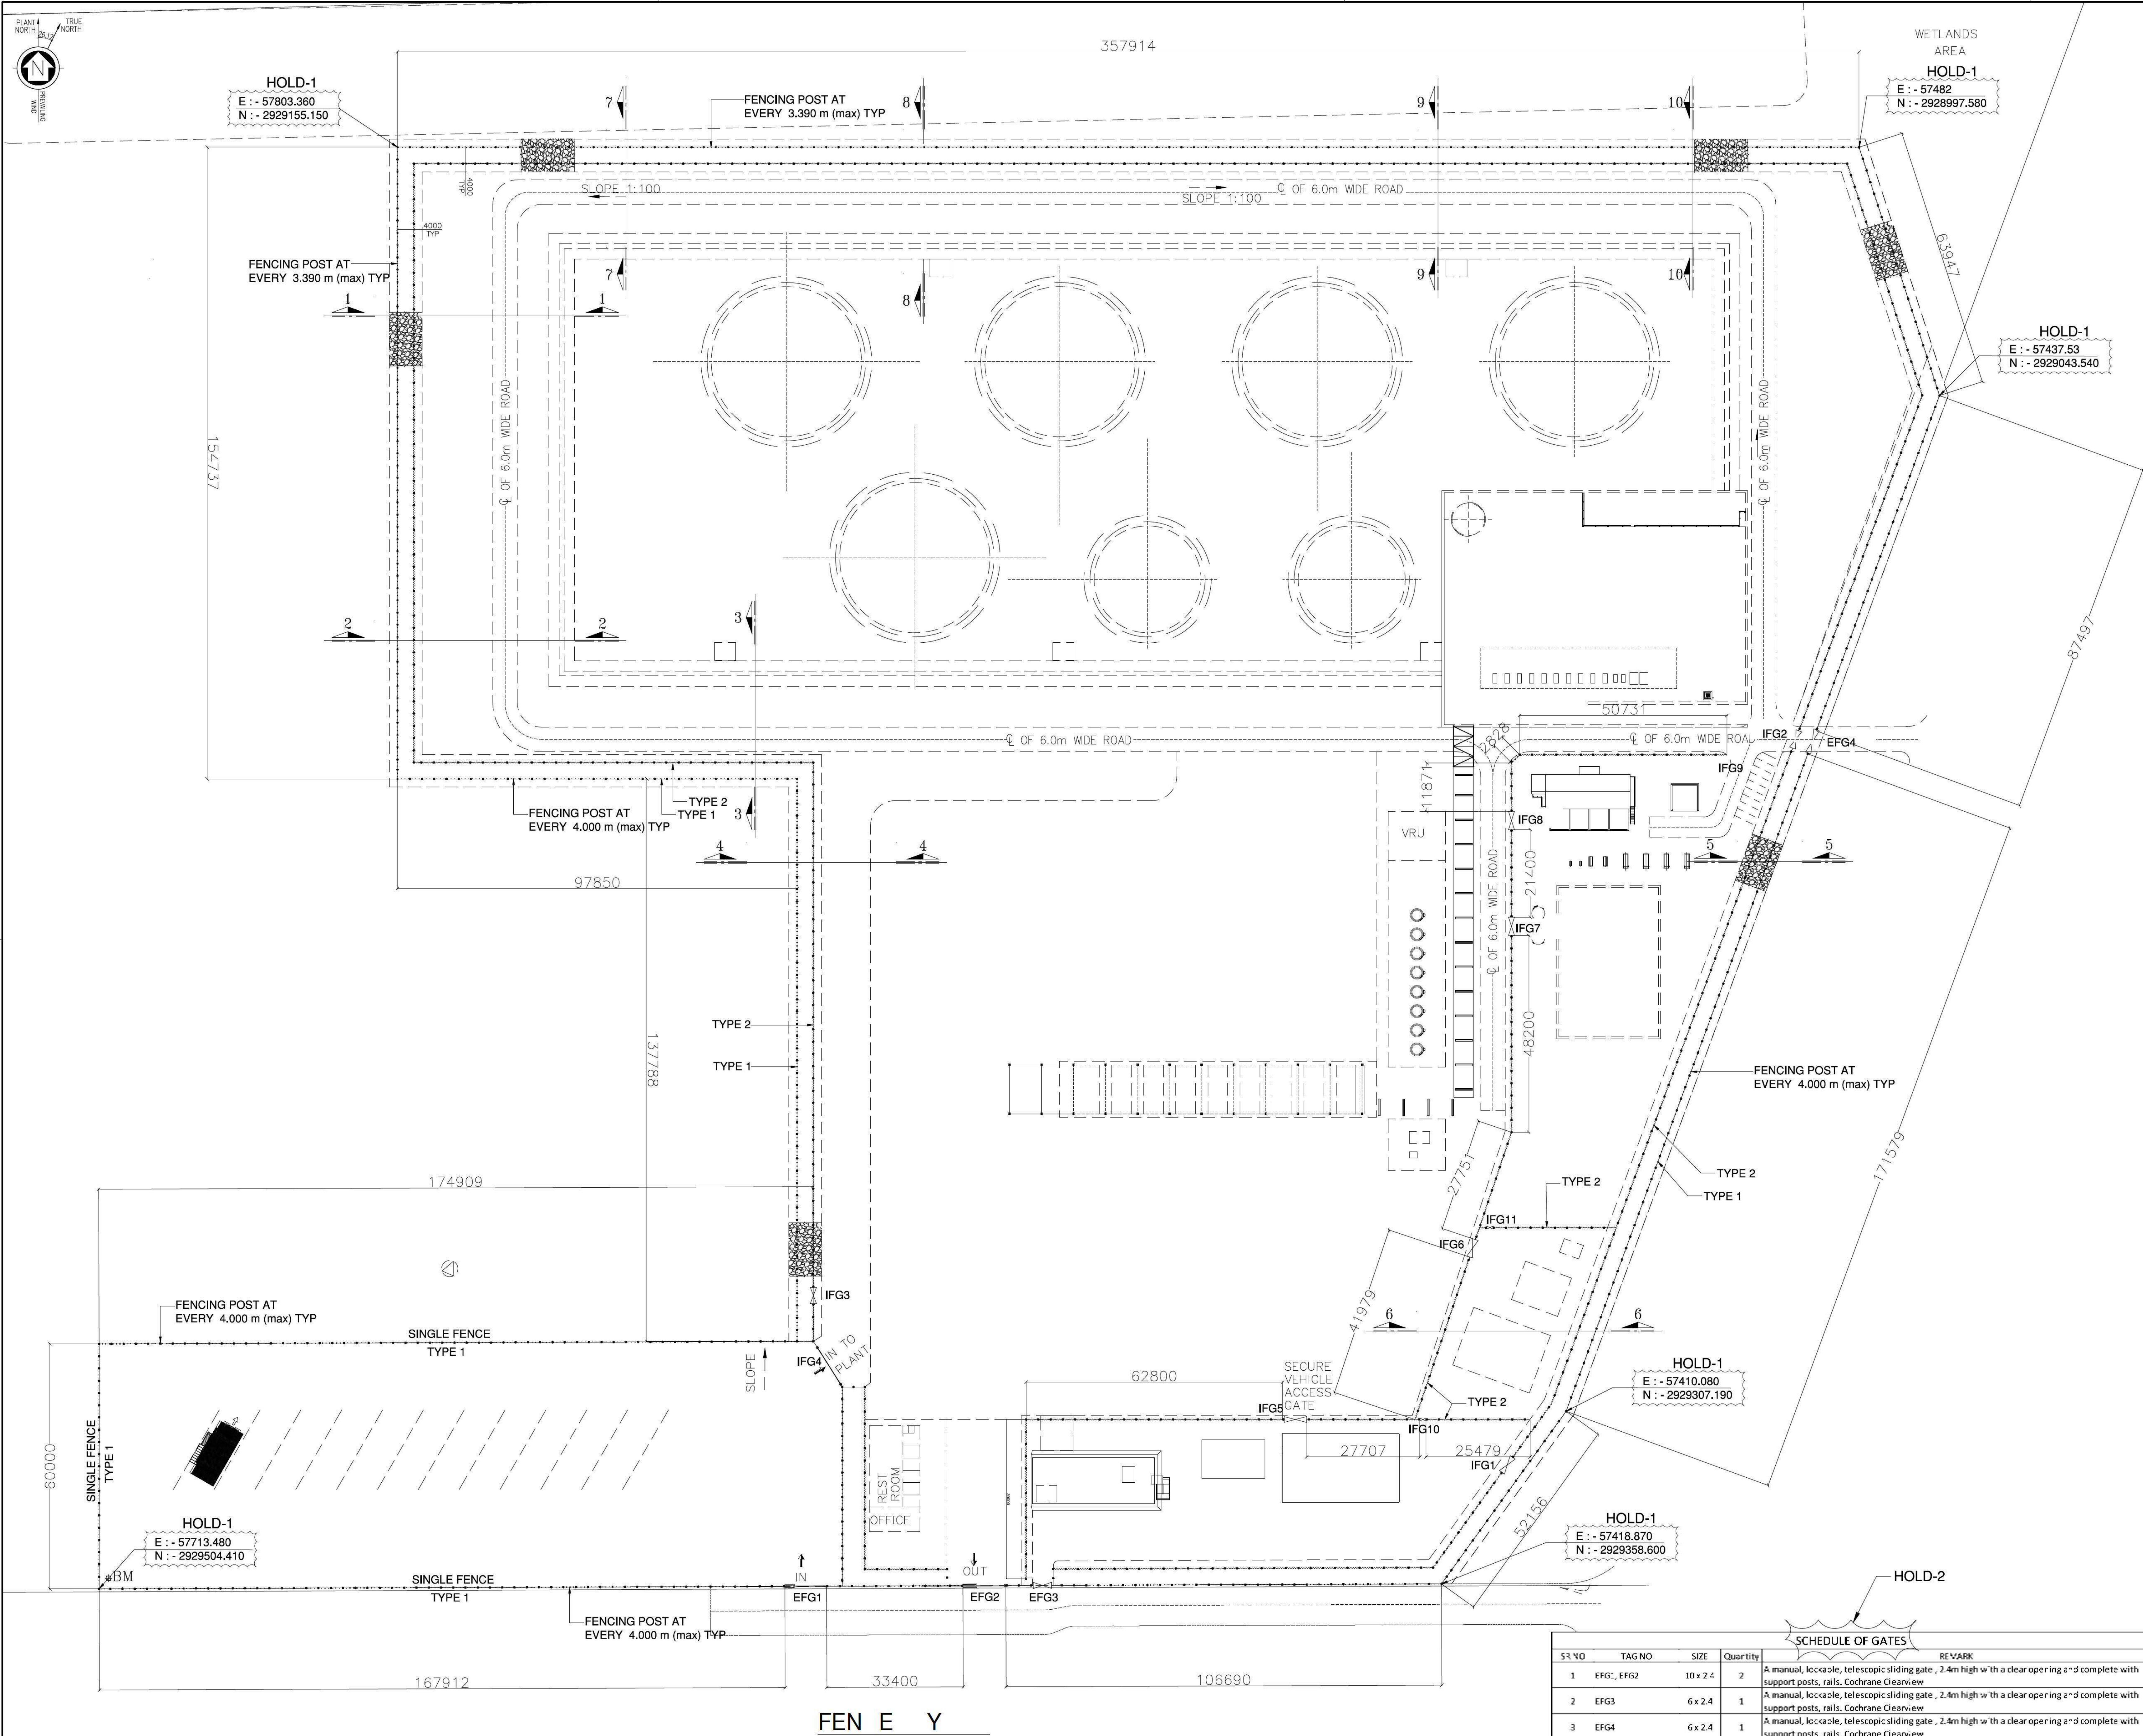

1. ALL DIMENSIONS ARE IN MILLIMETERS AND ELEVATION & CO-ORDINATES ARE IN METERS. UNLESS OTHERWISE SPECIFIED.

2. IF ANY DISCREPANCY IN SCALE IS FOUND ON THIS DRAWING, THE WRITTEN DIMENSION GOVERN.

3. MINOR CHANGES CAN BE OCCURRED AS PER ACTUAL SITE CONDITION AND THE SAME TO BE COMMUNICATED WITH CLIENT.

4. FGL ELEVATION +100.00m CORRESPONDS TO +X.XXX m ABOVE M.S.L.

5. FOR NGL REFER TO TOPOGRAPHY SURVEY.

A

UN N OR N NG O C G H NO C M
N H R G OC ON C N ON ON O H
U

FGL – FINISHED GROUND LEVEL
HPP – HIGHEST PAVEMENT POINT
EFG – EXTERNAL FENCE GATE
IFG – INTERNAL FENCE GATE

TBC – TO BE CONFIRMED

75 mm THK GRAVEL

TYPE 1 : COCHRANE ClearVu panels as per supplier specification
TYPE 2 : COCHRANE Economesh panels as per supplier specification.

O OR N R UN R HO
G C ON G UN ON R UN R HO

A

CTL-40312003-L02-501-001-001 PLOT PLAN

A	10.11.2017	RJP	MVM	ISSUED FOR CLIENT COMMENTS
ISSUE	DATE	DRAWN	CHECKED	DESCRIPTION
PROJECT: VOPAK TERMINAL LESEDI				

CLIENT: **Vopak** VOPAK SOUTH AFRICA DEVELOPMENTS

EPC CONTRACTOR: **CTD** CHEMIE-TECH SA (PTY) LTD.

TITLE: **FENCE LAYOUT DRAWING**

SCALE: NTS	DATE: 01.11.17	FORMAT: A1	ARCH.NR.: CTL-40312003-C02-503-043-001	SHEET: 001
DRAWN: RJP	CHECKED: MVM	OF: 003	ISSUE: A	

S/N	NO	TAG NO	SIZE	Quantity	REMARK
1	FFG1, EFG2		10 x 2.4	2	A manual, loccable, telescopic sliding gate, 2.4m high with a clear opening and complete with support posts, rails. Cochrane Clearview
2	EFG3		6 x 2.4	1	A manual, loccable, telescopic sliding gate, 2.4m high with a clear opening and complete with support posts, rails. Cochrane Clearview
3	EFG4		6 x 2.4	1	A manual, loccable, telescopic sliding gate, 2.4m high with a clear opening and complete with support posts, rails. Cochrane Clearview
4	IFG3, IFG2, IFG3		4 x 2.4	3	A manual, loccable, sliding gate, 2.4m high with a clear opening and complete with support posts, foundations and rails. Cochrane Economesh Boom type
5	IFG4		10	1	A manual, loccable, sliding gate, 2.4m high with a clear opening and complete with support posts, foundations and rails. Cochrane Economesh
6	IFG5, IFG6, IFG7, IFG8		4 x 2.4	4	A manual, loccable, sliding gate, 2.4m high with a clear opening and complete with support posts, foundations and rails. Cochrane Economesh
7	IFG9		6 x 2.4	1	A manual, loccable, sliding gate, 2.4m high with a clear opening and complete with support posts, foundations and rails. Cochrane Economesh
8	IFG10, IFG11		1.2 x 2.4	2	Lockable pedestrian gates 2.4m high with a clear opening of 1.2m. The gate leaf is to be Cochrane Economesh

ANNEXURE 16

Third Party Access

Vopak is an independent storage provider and therefore an open access facility to customers including Third Parties on the commingling basis.

While Vopak has long term contracts (of ~5 yrs) in place (whose capacities are dedicated and some to be commingled as part of growth 4), we are also working to implement short term storage capacity on commingled basis, where third parties (who prefer short term storage) will be allowed access to capacity for a limited period (~9 days).

As part of growth 4; Vopak is working on throughput flexible contracting (whose contract can be a year and subject to monthly off take) on commingled basis; mainly targeting injections to NMPP.

The current capacity in Durban will increase to 340 kcbm by the end of the year. We are targeting 2-3 throughputs in Durban to achieve ~ one million CBM per month.

A high throughput distribution terminal in Lesedi whose construction is underway will have a tank capacity of 100 kcbm on commingled basis which will allow open access and connection to Durban via NMPP.

PRELIMINARY 3RD PARTY ACCESS APPLICATION FORM	
ADMINISTRATIVE DETAILS	
COMPANY NAME	
COMPANY REGISTRATION NUMBER	
WHOLESALE LICENCE NUMBER	
LEVEL OF BLACK SHAREHOLDING (%)	
LEVEL OF BLACK WOMAN SHAREHOLDING (%)	
TYPE OF ENTITY	(MARK WITH AN X)
EME	
QSE	
LARGE ENTERPRISE	
ADDRESS	
CONTACT NUMBER	
OFFICE	
CELL	
CONTACT PERSON	
SURNAME	
NAME	
OPERATIONAL DETAILS	
ROYALE FACILITY ACCESS REQUIRED	
NAMES	
LICENCE NUMBERS	
PRODUCT TO BE STORED	
GRADES	
(SANS) SPECIFICATION	
THROUGHPUT CAPACITY REQUIRED	
VOLUME (M3)	
DURATION OF STORAGE	
DISCHARGE MODE OF TRANSPORT	(MARK WITH AN X)
ROAD	
RAIL	
PIPE	
UPLIFT MODE OF TRANSPORT	(MARK WITH AN X)
ROAD	
RAIL	
PIPE	